

Industrial design of LED

30°

LED

Siro

2026

www.sirogroup.org



Hi-Light Lighting

www.hilight-lighting.com





Xiamen Headquarters 50acres



Zhangzhou factory 210acres



Thailand factory 70acres

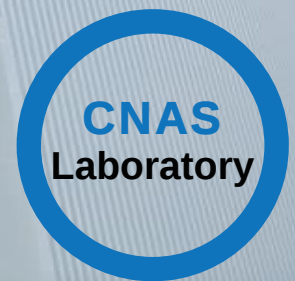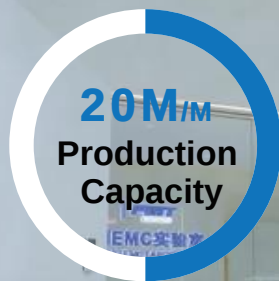

- **SiroBuildex,** founded in 2001, is a national high-tech enterprise, specialized in LED lighting for over 20 years. Headquartered in Xiamen, China, we have three manufacturing bases located in Xiamen and Zhangzhou of China, and Chonburi of Thailand, covering a total area of over 300 acres and nearly 300,000 square meters of production workshops, office buildings, R&D centers and CNAS national standard laboratory. Throughout all these years, we have built an industrial chain integrating innovative research and development, intelligent manufacturing and intelligent lighting solution output. With more than 2,000 employees and a monthly production capacity of over 20 million pieces, we have established long-term and stable cooperative relations with mainstream supermarkets and brands in North America, Europe and Asia-Pacific.

- **Highly-qualified Products**

With our rich ODM/OEM experience and proven performance, we are currently a prominent partner of many world famous lighting brands and large international chain stores. We have customers enjoying our products and service over 60 countries and we are one of the main suppliers of LED, CFL and other lighting products in US market.

- **One-Stop Products Selection**

We have developed a full range of LED lighting products from light bulbs to lighting fixtures, covering over a thousand models, which can meet the demands of different markets around the world. We are confident to provide customers with one-stop LED solutions with accredited quality, capacity and variety.

- **Quality Certification**

As a dual-system certified enterprise (ISO9001, ISO14001), we have established access thresholds covering the global mainstream markets:

- ✓ Safety Certification: UL/CUL/ETL/CE/GS-LVD/PSE
- ✓ Energy Efficiency Certification: ENERGY STAR/DLC/EUP/MEPS
- ✓ Regional Certification: CCC/CQC/KC/SAA/C-Tick
- ✓ Professional Certification: CB/ENEC/NOM/PROCELL

Relying on the intelligent manufacturing system and the CNAS standard laboratory, we ensure that each product complies with the technical specifications of various countries. We have now achieved barrier-free access to major lighting markets such as Europe, America, Asia-Pacific, and Latin America.

Contents

01 / Functional Lighting


Lumen Selectable Light	01
3CCT/5CCT/6WAY Light	02-04
3CCT/3WAY Light	05-06
3WAY DIM Light	07
Downlight/6WAY	08
2.4G Remote Control Light	09
IR Remote Control Light	10
Microwave Motion Sensor Light	11
Light Sensor Light	12
PIR Motion Sensor Light	13
PIR Motion Sensor Night Light	14
Battery Backup Emergency Light	15
Mosquito Killer Bulb	16
Grow Light	17-18
Flame Light	19
Spiral Light	20

02 / General Lighting

General Lighting	21
G4	22
G8	23
G9	24
Mini Light	25-27
Candle	28
Fan Light	29
Linear Tube	30
MR11/MR16	31
GU10	32-34

Contents

GU24	35
PU60	36
A15	37
A60	38
Color A19	39
JDR	40
PAR Series with Adjustable Angle	41-42
Color PAR Series	43
PAR Series - Gen13	44
PAR Series - Gen10	45
PAR Series - PAR36	46
PAR Series - High Power	47
BR Series	48
Reflector Series	49-50
Globe Series	51-52
2D Tube	53
T9/T5 Circular Led	54
UFO	55
T Bulb	56-58
Downlight	59-67
Downlight/wifi	68
Night Light	69
Beam Light	70

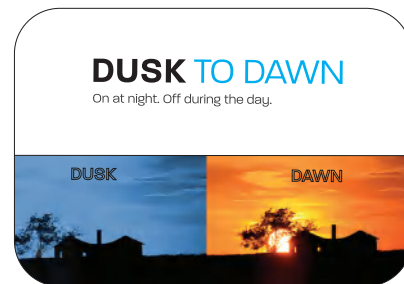

Functional Lighting

Features

Light motion sensor

Equipped with built-in light motion sensor, energy saving in unmanned environment

microwave motion sensor

Equipped with built-in microwave motion sensor, energy saving in unmanned environment

PIR motion sensor

Equipped with PIR motion sensor, energy saving in unmanned environment

Light sensor

Equipped with built-in light sensor, energy saving in unmanned daytime environment




Lumen Selectable Light




Features

- 3-in-1 & 5-in-1 selectable white
- Pick a light color to match your mood or room by selecting the color switch on the lamp or adjust color with regular wall switch
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty

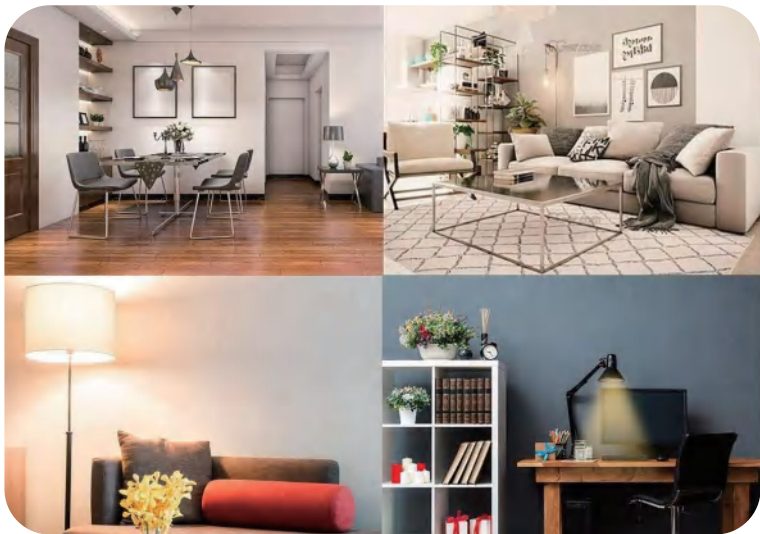


Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDR30-5WY-15.5W	90-260/120/230	7.2/12.2/15.5	650/1100/1400	2700~6500	E26	φ 95*127
HLLEDA19-5WY-16.5W	90-260/120/230	5/8.8/12.2/16.5	450/800/1100/1600	2700~5000	E26/E27/B22	φ 60*117.6

3CCT/5CCT/6WAY Light



Features

- 3-in-1 & 5-in-1 selectable white
- Pick a light color to match your mood or room by selecting the color switch on the lamp or adjust color with regular wall switch
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty

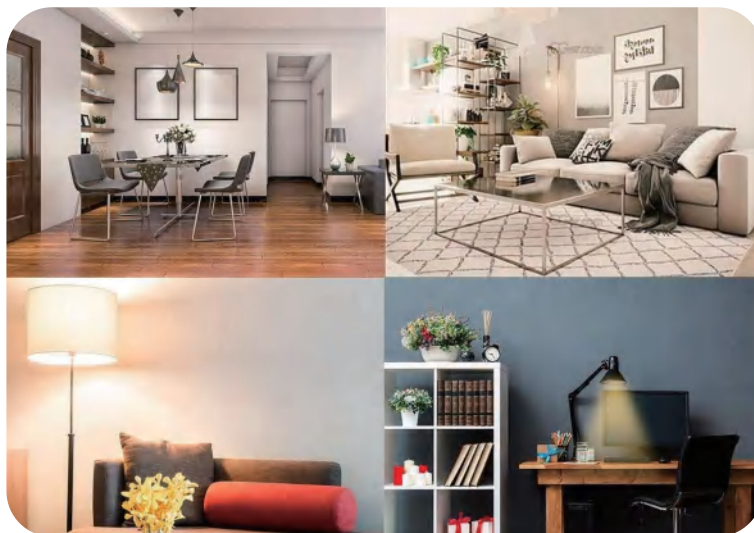


Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDGU10-5WY-7W	90-260/120/230	7	500	2700~6500	GU10	φ 50*56
HLLEDG45-5WY-5W	90-260/120/230	5	500~450	2700~6500	E26/E27/B22	φ 45*82
HLLEDCFC-5WY-5.5W	90-260/120/230	5.5	500~450	2700~6500	E12	φ 41*118
HLLEDA19-5WY-16.5W	90-260/120/230	5/8.8/12.2/16.5	450/800/1100/1600	2700~5000	E26/E27/B22	φ 60*117
HLLEDA23-5WY-28W	90-260/120/230	28	2605	2700~6500	E26/E27/B22	φ 74*134
HLLEDA21-5WY-28W	90-260/120/230	28	3050	2700~6500	E26/E27/B22	φ 70*125.5
HLLEDA21-5WY-33W	90-260/120/230	33	4060	2700~6500	E26/E27/B22	φ 80*140
HLLEDR80-5WY-10W	90-260/120/230	10	800~900	2700~6500	E26/E27/B22	φ 80*114.5

3CCT/5CCT/6WAY Light



Features

- 3-in-1 & 5-in-1 selectable white
- Pick a light color to match your mood or room by selecting the color switch on the lamp or adjust color with regular wall switch
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty

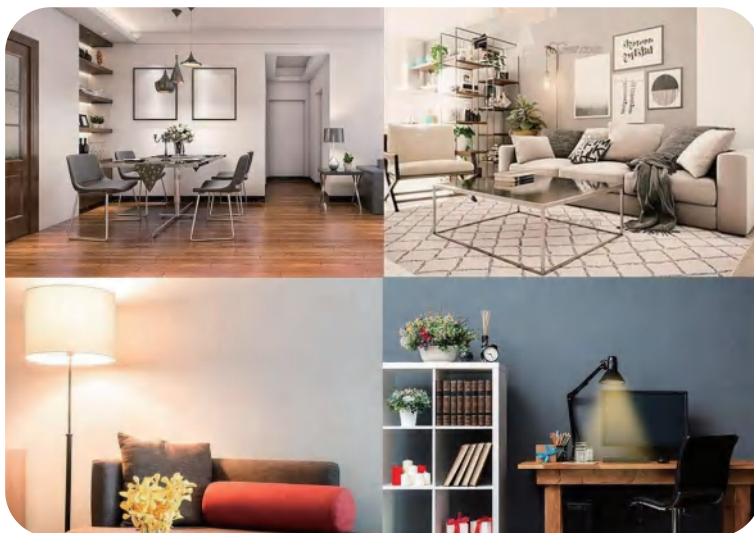

Beam Angle
<110°

CRI 90+
TRUE COLORS

Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLED14-3.3W-6WY	120/230	3.3	300	2700~5000	E26/E17	φ 45*62.5
HLLED16-6WY-4.4W	120/230	4.4	400	2700~5000-Auto	E26	φ 50*90
HLLED20-6WY-5W	120/230	5	450	2700~6500	E26/E27/B22	φ 62*99
HLLED30-6WY-7.2W	120/230	7.2/8.3	650/750	2700~5000-Auto	E26/E27/B22	φ 95*127
HLLED30-6WY-24.4W	120/230	12.2/15.5/24.4	1100/1400/2200	2700~5000-Auto	E26/E27/B22	φ 95*127
HLLED40-6WY-9.4W	120/230	9.4	850	2700~6500	E26/E27/B22	φ 120*162
HLLED40-6WY-15.5W	120/230	15.5	1400	2700~5000-Auto	E26/E27/B22	φ 120*162
HLLED40-6WY-24W	120/230	24	2175	2700~5000	E26/E27/B22	φ 120*162

3CCT/5CCT/6WAY Light



Features

- 3-in-1 & 5-in-1 selectable white
- Pick a light color to match your mood or room by selecting the color switch on the lamp or adjust color with regular wall switch
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty




Beam Angle
<40°

CRI 90+
TRUE COLORS


Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDPAR16-4.1W-5WAY	120	4.1	375	2700~5000	E26	φ 50*77.5
HLLEDPAR20-5W-5WAY	120	5	450	2700~5000	E26	φ 64*84
HLLEDPAR30S-8.3W-5WAY	120	8.3	750	2700~5000	E26	φ 95*90
HLLEDPAR30-8.3W-5WAY	120	8.3	750	2700~5000	E26	φ 95*120.5
HLLEDPAR38-11.1W-5WAY	120	11.1	1000	2700~5000	E26	φ 122*130
HLLEDPAR38-15.5W-5WAY	120	15.5	1400	2700~5000	E26	φ 121.4*129.8
HLLEDPAR38-17.7W-5WAY	120	17.7	1600	2700~5000	E26	φ 121.5*130
HLLEDPAR38-33.3W-5WAY	120	33.3	3000	2700~5000	E26	φ 121.5*130
HLLEDPAR38-28.9W-5WAY	120	28.9	2605	2700~5000	E26	φ 121.5*130

3CCT/3WAY Light



Features

- Equipped with built-in light/microwave motion sensor, energy saving in unmanned environment
- When lumen is low (<10lux), light will auto turn on
- When lumen is high (>25lux), light will auto turn off
- With motion sensor only, light will turn on only in manned environment
- 3-in-1 & 5-in-1 selectable white
- Pick a light color to match your mood or room by selecting the color switch on the lamp or adjust color with regular wall switch
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty

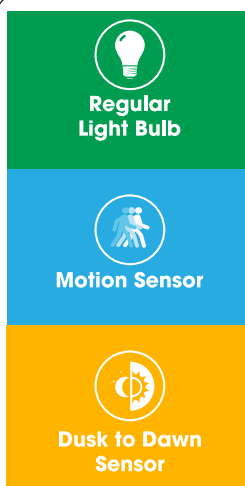

Motion Sensor

Turns light on for 5 minutes when motion is detected. Light remains on until 5 minutes without motion passes.




Dusk to Dawn Sensor

Prevents motion during day from triggering light, saving energy. The rotating base allows for the light sensor to be positioned to point in the desired direction.



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLED-CCT-38W	90-260/120/230	38	4000	2700~6500	E26/E27/B22	φ 79.5*217.7
HLLED-CCT-45W1	90-260/120/230	45	5000	2700~6500	E26/E27/B22	φ 84*180

3CCT/3WAY Light

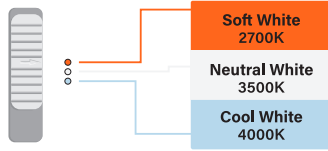

Features

- 3-in-1 selectable white
- Pick a light color to match your mood or room by selecting the color switch on the lamp or adjust color with regular wall switch
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLED-CCT-9W	100-277	9	600~700	2700~6500	G24Q-1	φ 40*116
HLLED-CCT-12W	100-277	12	800~900	2700~6500	G24Q-2	φ 40*134
HLLED-CCT-18W	100-277	18	1400~1500	2700~6500	G24Q-3	φ 40*145
HLLED-CCT-13W	90-260/120/230	13	1200~1300	2700~6500	GX24	φ 55*110.5

3WAY DIM Light



Features

- For use in 3-way socket only
- High quality driver with minimized flickering
- Use high quality chips in ALU+PC body with high diffusion PC cover
- Customized base
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



This Lamp Operates
Medium, Low, High



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDA50-3WAY-16W	120/230	5/10/16	500/1050/1600	2700~6500	E26D/E27D	φ 60*118
HLLEDA50-3WAY-21W	120/230	7/15/23	800/1600/2200	2700~6500	E26D/E27D	φ 74*134.5

Downlight/6WAY



Features

- wattage adjustable
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 25,000H with 3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLED4-6WAY-11.1W	120	11.1	1000	2700K-5000K	E26	φ 60.3*128
HLLED56-6WAY-22.5W	120	22.5	2000	2700K-5000K	E26	φ 190*67.8
HLLED4-6WAY-3Wattage	120	8.5	700/540/390	2700K-5000K	E26	φ 60*127.5
HLLED56-6WAY-3Wattage	120	14.3/11.3/9.4	1290/1025/850	2700K-5000K	E26	φ 190*67.8

2.4G Remote Control Light



Features

- With 2.4G RF controller
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty




Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDGU10-HP-5W	90-260/120/230	5	250~350	2700~6500	GU10	φ 50*57
HLLEDGU10-HP-7W	90-260/120/230	7	450~550	2700~6500	GU10	φ 50*57
HLLEDA19-HP-6W	90-260/120/230	6	550~600	2700~6500	E26/E27/B22	φ 60*112
HLLEDA19-HP-8W	90-260/120/230	8	800~850	2700~6500	E26/E27/B22	φ 60*112
HLLEDA19-HP-12W	90-260/120/230	12	1200~1300	2700~6500	E26/E27/B22	φ 60*116
HLLEDGEN11-HP-PAR38-12W	90-260/120/230	12	950~1050	2700~6500	E26/E27/B22	φ 121*130
HLLEDGEN11-HP-PAR38-16W	90-260/120/230	16	1300~1400	2700~6500	E26/E27/B22	φ 122*133

IR Remote Control Light



Features

- Infrared remote control RGBW
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty

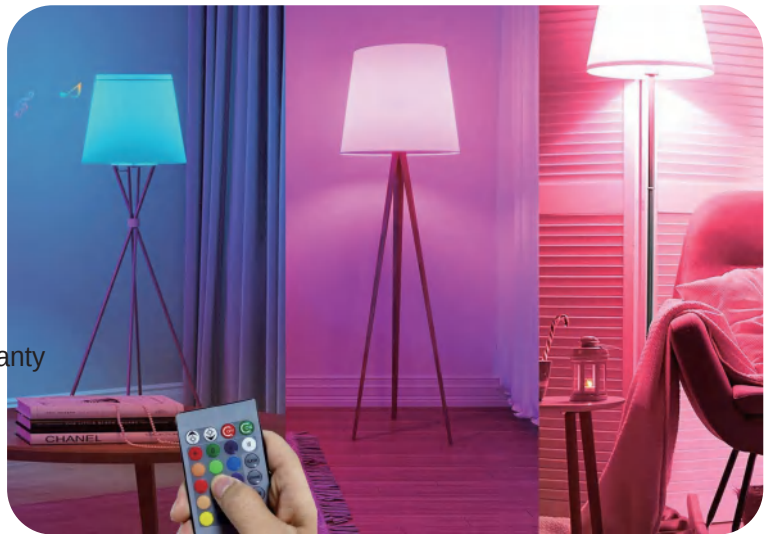


Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLLEDGU10-6W/IR	220-240V	4.8/6	400~500	RGB+3000K	GU10	φ 50*54
HLLLED37-6W/IR	220-240V	6	580	RGB+3000K	E27/ E14	φ 37*99
HLLLED37-4.8W/IR	220-240V	4.8	420	RGB+3000K	E27/ E14	φ 37*101
HLLLEDG45-6W/IR	220-240V	6	580	RGB+3000K	E14	φ45*89
HLLLEDG45-4.8W/IR	220-240V	4.8	420	RGB+3000K	E27	φ45*82
HLLLED60-8W/IR	220-240V	8/10/12	806~950~1170	RGB+3000K	E27	φ60*116

Microwave Motion Sensor Light



Features

- Equipped with microwave motion sensor, energy saving in unmanned environment
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty

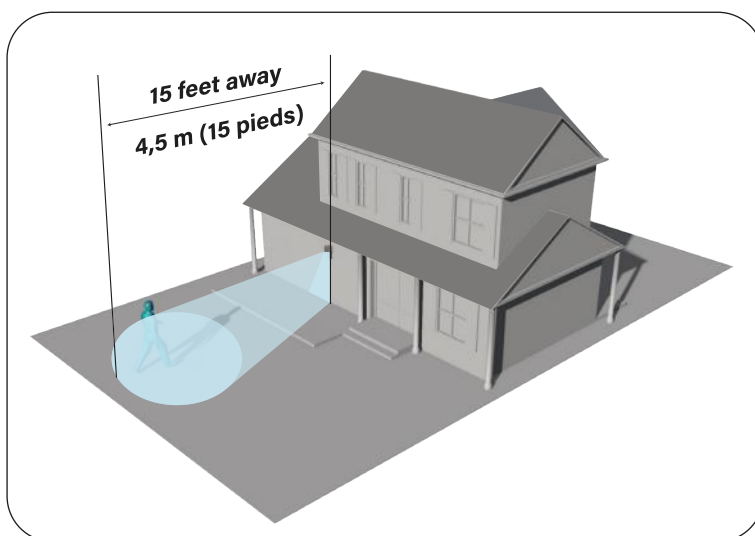

Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDA19-6W/MM	120	6	350~450	2700~6500	E26/E27/B22	φ 60*110
HLLEDA19-6W/MM	120	6	450	3000/4100/6500	E27	φ 60*118
HLLEDA19-10W/MM	120	10	700~800	2700~6500	E26/E27/B22	φ 60*110

Light Sensor Light




Features

- Equipped with built-in light sensor, energy saving in unmanned daytime environment
- When lumen is low ($<10\text{lux}$), light will auto turn on
- When lumen is high ($>25\text{lux}$), light will auto turn off
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty

DUSK TO DAWN

On at night. Off during the day.

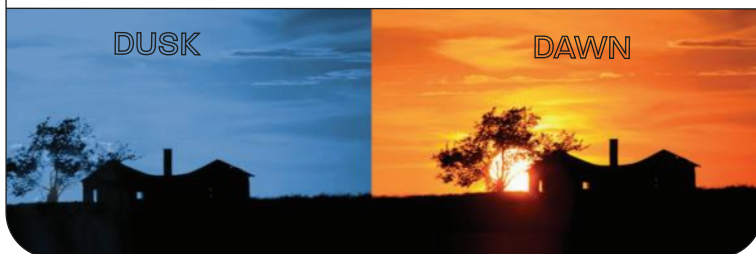

CRI 90+
TRUE COLORS

Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDA19-DD-6W	90-260/120/230	6	450~510	2700~6500	E26/E27/B22	φ 60*112
HLLEDA19-DD-8W	90-260/120/230	8	600~660	2700~6500	E26/E27/B22	φ 60*112
HLLEDA19-DD-10W	90-260/120/230	10	800~860	2700~6500	E26/E27/B22	φ 60*112

PIR Motion Sensor Light



Features

- Equipped with microwave PIR motion sensor, energy saving in unmanned environment
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty




Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDAR50-PIR-4.4W	90-260/120/230	4.4	1100~1200	2700~6500	E26/E27/B22	φ 50*83
HLLEDR63-PIR-6W	90-260/120/230	6	1100~1200	2700~6500	E26/E27/B22	φ 63*102
HLLEDRA15-PIR-6W	90-260/120/230	5	500	2700~6500	E26/E27/B22	φ 48*93
HLLEDA19-PIR-9W	90-260/120/230	9	806	2700~6500	E26/E27/B22	φ 60*117
HLLEDA19-PIR-6W-5WAY	90-260/120/230	6	450~500	2700~6500	E26/E27/B22	φ 60*121
HLLEDA19-PIR-8W-5WAY	90-260/120/230	8	806	2700~6500	E26/E27/B22	φ 60*121
HLLEDGEN11-PAR38PIR-13.3W	90-260/120/230	13.3	1100~1200	2700~6500	E26/E27/B22	φ 121.5*133

PIR Motion Sensor Night Light



Features

- Equipped with PIR motion sensor, energy saving in unmanned environment
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty
- Plug in to light up ,Slim design space saving

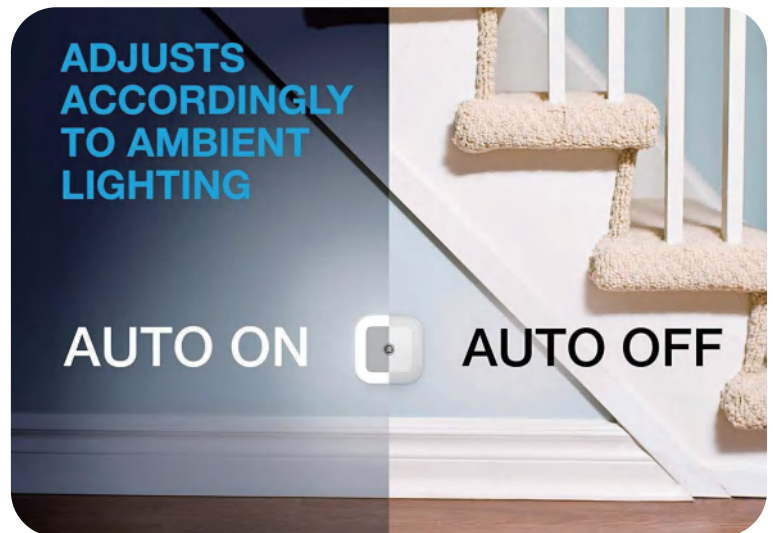

CRI 90+
TRUE COLORS

Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLED-NL-1W	90-260/120/230	1	20	2700~6500	—	55*55*41

Battery Backup Emergency Light



Features

- Emergency light with backup battery
- When there is power failure, use the light like a flashlight by pressing the power button on the bulb, can last at 300lm for 3-4 hours
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty

BATTERYBACKUP

Reliable, rechargeable emergency lighting.



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLED-BBEL-8.8W-A21	90-260/120/230	8.8	740~800	2700~6500	E26/E27/B22	φ 70*137
HLLEDA70-BBEL-8W	90~265	8	700	6500	E27	φ 133*68
HLLEDA80-BBEL-12W	220~240	12	1170	2700~6500	E27/B22	φ 148.3*77.5
HLLEDT100-BBEL-20W	90~260/120/230	20	2000	2700~6500	E26/E27	φ 171/173.5*100
HLLEDT120-BBEL-30W	90~260/120/230	30	3000	2700~6500	E26/E27	φ 207.7/210*120

Mosquito Killer Bulb

Features

- Turn the light switch ON once to enable full regular lighting+bug zapper light.
- Turn the light switch OFF and ON a second time to enable 50% regular lighting+ bug zapper light.
- Turn the light switch OFF and ON a third time to enable bug zapper light only.



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLED-T80-6W	220-240	6	300	6500	E27	φ 78*166

Grow Light




Features

- Use special LEDs to promote plant growth
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDA19-GL-6W	90-260/120/230	6	—	—	E26/E27/B22	φ 60*110
HLLEDA19-GL-8W	90-260/120/230	8	—	—	E26/E27/B22	φ 60*110
HLLEDA19-GL-10W	90-260/120/230	10	—	—	E26/E27/B22	φ 60*110
HLLEDR30-GL-6W	90-260/120/230	6	—	—	E26/E27/B22	φ 95*127
HLLEDR30-GL-8W	90-260/120/230	8	—	—	E26/E27/B22	φ 95*127
HLLEDR30-GL-10W	90-260/120/230	10	—	—	E26/E27/B22	φ 95*127
HLLEDGEN11-GL-PAR38-8W	90-260/120/230	8	—	—	E26/E27/B22	φ 122*133
HLLEDGEN11-GL-PAR38-16W	90-260/120/230	16	—	—	E26/E27/B22	φ 122*133
HLLEDR63-GL-6W	90-260/120/230	6	—	—	E26/E27/B22	φ 63*98.5

Grow Light

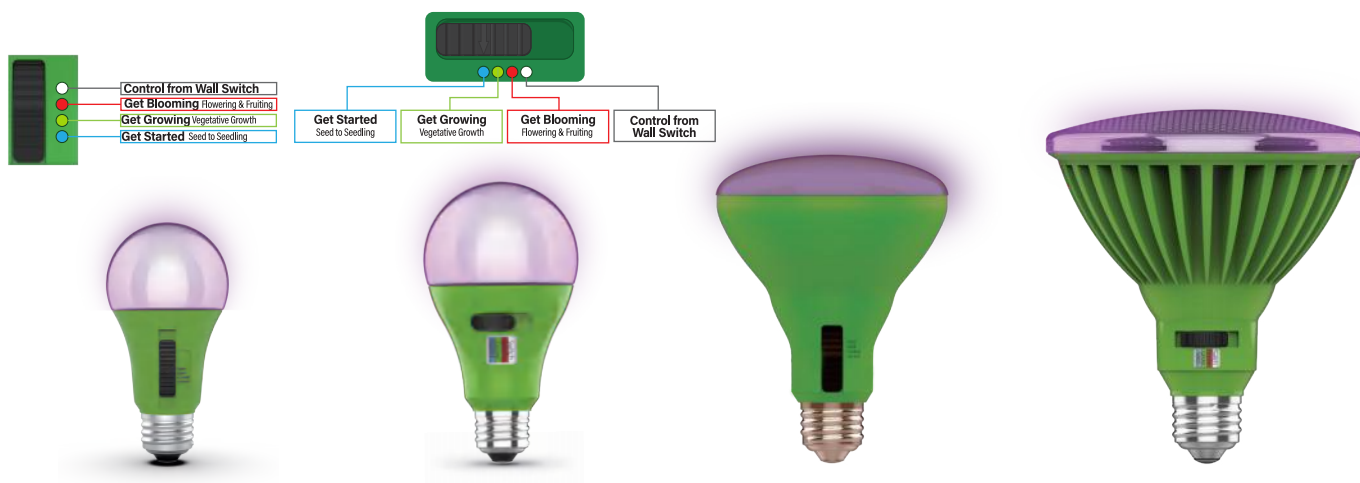

Features

- Use special LEDs to promote plant growth
- Switch control for target growth stage, work more efficiently
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty




Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDA19-GL-4WY-9W	120	9	660	white/red/blue	E26/E27/B22	φ 60*118
HLLEDRA21-GL-4WY-17.7W	90-260/120/230	17.7	—	—	E26/E27/B22	φ 74*135
HLLEDR30-GL-4WY-9W	90-260/120/230	9	—	—	E26/E27/B22	φ 95*127
HLLEDPAR38-GL-4WY-30W	90-260/120/230	30	—	—	E26/E27/B22	φ 122*133

Flame Light



Features

- Use special LEDs to provide flame effect, perfect for decoration
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty

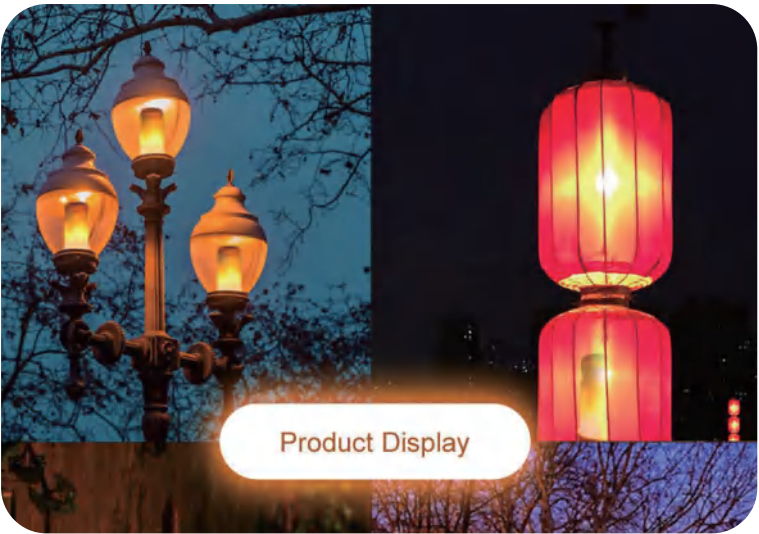

Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDFLAME-2W-C4	90-260/120/230	2	50~60	1500/1800	E26/E27/B22	φ 65*134.5

Spiral Light



Features

- Made of PVC+ aluminum, using bending process.
- Anode process + spray painting for black and gold products; Special indium plating for silver (chrome) ones to avoid electrical conduction.
- Available in 3CCT
- High quality driver with minimized flickering
- Use high quality chips in ALU+PVC body
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



CRI 90+
TRUE COLORS

Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDFA-5.5W	120	5.5	500	3000	E26	φ 169.4*317.5
HLLEDFA-5.5W	120	5.5	500	3000	E26	φ 169.4*317.5



General Lighting

Features

- High quality body materials with improved heat dissipation
- High quality driver with minimized flickering
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



G4



Features

- High quality body materials with improved heat dissipation
- High quality driver with minimized flickering
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



CRI 90+
TRUE COLORS

Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDG4-2.5W	12	2.5	150~170	2700~6500	G4	φ 12.7*31.3
HLLEDG4-4W	12	4	320~350	2700~6500	G4	φ 13.5*50.5
HLLEDG4-COB-2.2W	12	3.2	250	2700~6500	G4	φ 18*50
HLLEDG4-COB-3.2W	12	2.2	350	2700~6500	G4	φ 18*50



Features

- High quality body materials with improved heat dissipation
- High quality driver with minimized flickering
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDG8-1.5W	120/230	1.5	100~110	2700~6500	G8	φ 13.5*31
HLLEDG8-2.2W	120/230	2.2	180~200	2700~6500	G8	φ 13.5*37

G9



Features

- High quality body materials with improved heat dissipation
- High quality driver with minimized flickering
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDG9-3W-C1	120/230	3	300	2700~6500	G9	φ 16*45.5
HLLEDG9-4W-C2	120/230	4	400	2700~6500	G9	φ 16*50
HLLEDG9-7W-C3	120/230	7	600~650	2700~6500	G9	φ 19.5*69
HLLEDG9-COB-3.2W	120/230	3.5	400	2700~6500	G9	φ 17.5*55.5
HLLEDG9-COB-4.2W	120/230	4.5	500	2700~6500	G9	φ 17.5*55.5

Mini Light



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDG9-3W-C4	120/230	3	250~300	2700~6500	E12	φ 18*65
HLLEDG9-4W-C4	120/230	4	350~400	2700~6500	E12	φ 18*65
HLLEDG9-4W1	120/230	4	350~400	2700~6500	E12	φ 16*53.5
HLLEDCL-3W	120/230	3	300~350	2700~6500	E14	φ 25*86
HLLEDT7-3.5W	90-260/120/230	3.5	250~300	2700~6500	E12/E14/E17/B15D	φ 19*58
HLLEDT9-3.3W	90-260/120/230	3.3	250~300	2700~6500	E12/E14/E17/B15D/E26	φ 30*76.2

Mini Light



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



CRI 90+
TRUE COLORS

Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLED11-2.5W	120/230	2.5	175~180	2700~6500	E17	φ 35*58
HLLED11-4W	120/230	4	340~350	2700~6500	E17	φ 35*58

Mini Light



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDT22-1W	90-260/120/230	1	40	2700~6500	E12/E14/E17/B15D	φ 22.5*59
HLLEDT25-1.5W	90-260/120/230	1.5	100	2700~6500	E12/E14/E17/B15D	φ 28*59
HLLEDT25-2.5W	90-260/120/230	2.5	180	2700~6500	E12/E14/E17/B15D	φ 28*59
HLLEDT26-1.7W	90-260/120/230	1.2	80	2700~6500	E12/E14/E17/B15D	φ 26*57

Candle



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDCA-4W	90-260/120/230	4	250~300	2700~6500	E26/E27/B22/E17/E14/E12/B15D	φ 37*102
HLLEDCA-4.5W	90-260/120/230	4.5	300~360	2700~6500	E26/E27/B22/E17/E14/E12/B15D	φ 37*102
HLLEDCA-5W	90-260/120/230	5	350~410	2700~6500	E26/E27/B22/E17/E14/E12/B15D	φ 37*102
HLLEDCA-6W	90-260/120/230	6	450~500	2700~6500	E26/E27/B22/E17/E14/E12/B15D	φ 37*102
HLLEDCA-7W	90-260/120/230	7	500~560	2700~6500	E26/E27/B22/E17/E14/E12/B15D	φ 37*102
HLLEDLEF-4W	90-260/120/230	4	250~300	2700~6500	E26/E27/B22/E17/E14/E12/B15D	φ 37*107
HLLEDLEF-4.5W	90-260/120/230	4.5	300~360	2700~6500	E26/E27/B22/E17/E14/E12/B15D	φ 37*107
HLLEDLEF-6W	90-260/120/230	6	450~500	2700~6500	E26/E27/B22/E17/E14/E12/B15D	φ 37*107
HLLEDLEF-7W	90-260/120/230	7	500~560	2700~6500	E26/E27/B22/E17/E14/E12/B15D	φ 37*107

Fan Light



Features


- High quality driver with minimized flickering
- Use high quality chips in ALU+PC body with high diffusion PC cover
- Customized base
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



CRI 90+
TRUE COLORS

Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDFA-45W	120	45	4000	3000/5000	E26	φ 280*152

Linear Tube

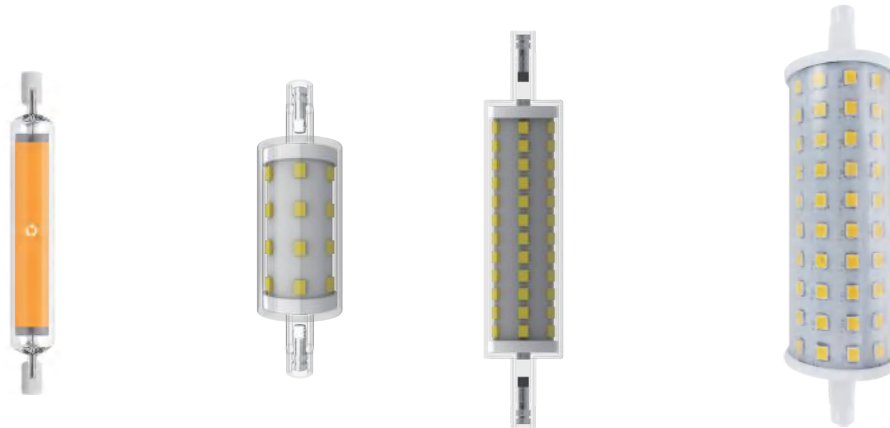

Features

- High quality body materials with improved heat dissipation
- High quality driver with minimized flickering
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty

Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDJ78-7W	90-260/120/230	7	450~510	2700~6500	R7S	φ 17*78
HLLEDJ78-8W	90-260/120/230	8	650~700	2700~6500	R7S	φ 17*78
HLLEDJ78-10W	90-260/120/230	10	800~850	2700~6500	R7S	φ 17*78
HLLEDJ118-9W	90-260/120/230	9	650~700	2700~6500	R7S	φ 17*118
HLLEDJ118-10W	90-260/120/230	10	800~850	2700~6500	R7S	φ 17*118
HLLEDJ118-12W	90-260/120/230	12	1000~1100	2700~6500	R7S	φ 17*118
HLLEDJ118-13W	90-260/120/230	13	1200~1300	2700~6500	R7S	φ 17*118
HLLEDJ118-14W	90-260/120/230	14	1400~1500	2700~6500	R7S	φ 17*118
HLLEDJ118-16W	90-260/120/230	16	1500~1600	2700~6500	R7S	φ 17*118
HLLED-J-typeE-5W	90-260/120/230	5	450	2700~6500	R7S	φ 23*78
HLLED-J-typeF-8W	90-260/120/230	8	800	2700~6500	R7S	φ 23*118
HLLED-J-typeA-5W	90-260/120/230	10	800~900	2700~6500	R7S	φ 29*78
HLLED-J-typeB-10W	90-260/120/230	15	1500~1600	2700~6500	R7S	φ 29*118

MR11/MR16



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC or glass body
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDMR11-2W	12	2	100~150	2700~6500	GU4	φ 35*37.3
HLLEDMR11-3W	12	3	150~200	2700~6500	GU4	φ 35*37.3
HLLEDMR16-3W-C1	90-260/120/230	3	200~250	2700~6500	GU5.3	φ 50*48.5
HLLEDMR16-5W-C1	90-260/120/230	5	300~350	2700~6500	GU5.3	φ 50*48.5
HLLEDMR16-6W-C1	90-260/120/230	6	400~450	2700~6500	GU5.3	φ 50*48.5
HLLEDMR16-7W-C1	90-260/120/230	7	500~550	2700~6500	GU5.3	φ 50*48.5
HLLEDMR16-4W-C3	12	4	300~350	2700~6500	GU5.3	φ 50*44
HLLEDMR16-5W-C3	12	5	350~400	2700~6500	GU5.3	φ 50*44
HLLEDMR16-6W-C3	12	6	400~450	2700~6500	GU5.3	φ 50*44
HLLEDMR16-7W-C3	12	7	500~550	2700~6500	GU5.3	φ 50*44
HLLEDMR16-3W-C4	12	3	200~250	2700~6500	GU5.3	φ 50*46
HLLEDMR16-4W-C4	12	4	300~350	2700~6500	GU5.3	φ 50*46
HLLEDMR16-5W-C4	12	5	350~400	2700~6500	GU5.3	φ 50*46
HLLEDMR16-6W-C4	12	6	400~450	2700~6500	GU5.3	φ 50*46
HLLEDMR16-7W-C4	12	7	500~550	2700~6500	GU5.3	φ 50*46
HLLEDMR16-4W-C4	12	4	300~350	3000/4000/5000	GU5.3	φ 50*46

GU10



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC or body
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Beam
Angle
< 40 °

CRI 90+
True Colors


Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDGU10-2W-C1	90-260/120/230	2	100~140	2700~6500	GU10	φ 35*48.7
HLLEDGU10-3W-C1	90-260/120/230	3	160~210	2700~6500	GU10	φ 35*48.7
HLLEDGU10-3W-C2	90-260/120/230	3	200~250	2700~6500	GU10	φ 50*57
HLLEDGU10-4W-C2	90-260/120/230	4	300~350	2700~6500	GU10	φ 50*57
HLLEDGU10-5W-C2	90-260/120/230	5	350~400	2700~6500	GU10	φ 50*57
HLLEDGU10-6W-C2	90-260/120/230	6	400~450	2700~6500	GU10	φ 50*57
HLLEDGU10-7W-C2	90-260/120/230	7	500~550	2700~6500	GU10	φ 50*57
HLLEDGU10-7W-C3	90-260/120/230	7	450~500	2700~6500	GU10/E26	φ 50*53.6
HLLEDGU10-9W-C4	90-260/120/230	9	800~850	2700~6500	GU10	φ 50*53.6

GU10



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC or glass body
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty

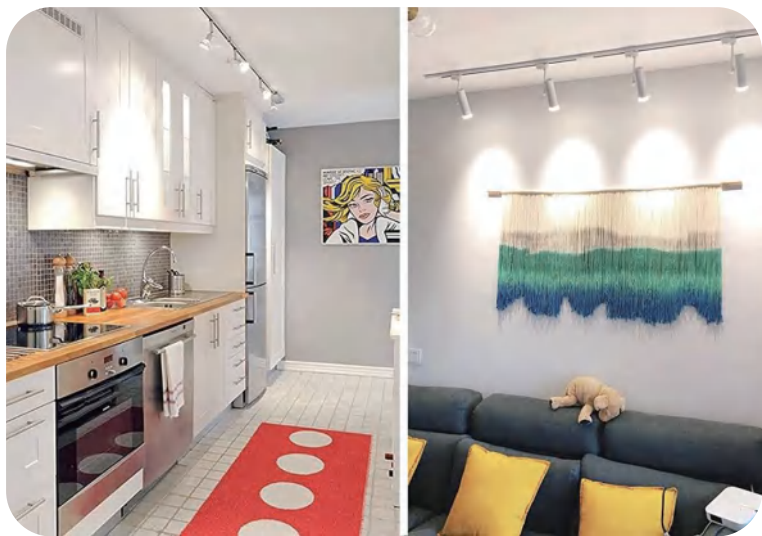

Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDGU10-5.5W-C5	90-260/120/230	5.5	400~450	2700~6500	E11	φ 50*62
HLLEDGU10-6W-C5	90-260/120/230	6	600~650	2700~6500	E11	φ 50*62

GU10



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC or glass body
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Full Glass

Beam Angle
< 40°

CRI 90+
TRUE COLORS

Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDGU10-4W-C6	90-260/120/230	4	300~350	2700~6500	GU10	φ 50*52.5
HLLEDGU10-5W-C6	90-260/120/230	5	350~400	2700~6500	GU10	φ 50*52.5
HLLEDGU10-6W-C6	90-260/120/230	6	450~500	2700~6500	GU10	φ 50*52.5
HLLEDGU10-7W-C6	90-260/120/230	7	500~550	2700~6500	GU10	φ 50*52.5
HLLEDGU10-4W-C7	90-260/120/230	4	300~350	2700~6500	GU10	φ 50*52.5
HLLEDGU10-5W-C7	90-260/120/230	5	350~400	2700~6500	GU10	φ 50*52.5
HLLEDGU10-6W-C7	90-260/120/230	6	450~500	2700~6500	GU10	φ 50*52.5
HLLEDGU10-7W-C7	90-260/120/230	7	500~550	2700~6500	GU10	φ 50*52.5
HLLEDGU10-4W-C7	90-260/120/230	4	300~350	3000/4000/5000	GU10	φ 50*52.5
HLLEDGU10-6W-C8	90-260/120/230	6	450~500	3000/4000/5000	GU10	φ 50*52.5
HLLEDGU10-7W-C7	90-260/120/230	7	500~550	3000/4000/5000	GU10	φ 50*52.5

GU24



Features

- GU24 lamp cap, lamp body with switch for brightness or color temperature change
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDGU24A19-6W	90-260/120/230	6	450~510	2700~6500	GU24	φ 60*100
HLLEDGU24A19-10W	90-260/120/230	10	800~860	2700~6500	GU24	φ 60*100
HLLEDGU24A19-12W	90-260/120/230	12	1100~1160	2700~6500	GU24	φ 60*100
HLLEDGU24A19-15W	90-260/120/230	15	1500~1600	2700~6500	GU24	φ 60*100
HLLEDGU24A19-3WAY	90-260/120/230	10	800	27/30/35/40/50	GU24	φ 60*114
HLLEDGU24A19-5WAY	90-260/120/230	15	1600	27/30/35/40/50	GU24	φ 60*114

PU60



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDT75-9W	90-260/120/230	9	750~800	2700~6500	GU24/E26/E27	φ 75*65
HLLEDT75-11W	90-260/120/230	11	800~860	2700~6500	GU24/E26/E27	φ 75*65

A15



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDA15-5W	90-260/120/230	5	440~500	2700~6500	E12/E14/E17	φ 35*72
HLLEDA15-6W	90-260/120/230	6	500~550	2700~6500	E12/E14/E17	φ 35*72
HLLEDA15-7.7W	90-260/120/230	7.7	760~820	2700~6500	E12/E14/E17	φ 35*72/45*88

A60



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDA55-4.9W	90-260/120/230	4.9	485~490	2700~6500	E26/E27/B22	φ 55*101
HLLEDA55-8.1W	90-260/120/230	8.1	810~910	2700~6500	E26/E27/B22	φ 55*101
HLLEDA19-6W	90-260/120/230	6	450	2700~6500	E26/E27/B22	φ 60*103
HLLEDA19-8W	90-260/120/230	8	600	2700~6500	E26/E27/B22	φ 60*103
HLLEDA19-10W	90-260/120/230	10	800	2700~6500	E26/E27/B22	φ 60*103
HLLEDA19-12W	90-260/120/230	12	1100	2700~6500	E26/E27/B22	φ 60*118
HLLEDA19-15W	90-260/120/230	15	1600	2700~6500	E26/E27/B22	φ 60*118
HLLEDA19-17W	90-260/120/230	15	1600	2700~6500	E26/E27/B22	φ 65*123
HLLEDA21-28W	90-260/120/230	28	2605	2700~6500	E26/E27/B22	φ 74*134

Color A19



Features

- LED with advanced tech provide vivid color
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDA19/R-5W	90-260/120/230	5	——	——	E26/E27/B22	φ 60*110
HLLEDA19/G-5W	90-260/120/230	5	——	——	E26/E27/B22	φ 60*110
HLLEDA19/B-5W	90-260/120/230	5	——	——	E26/E27/B22	φ 60*110
HLLEDA19/Y-5W	90-260/120/230	5	——	——	E26/E27/B22	φ 60*110
HLLEDA19/O-5W	90-260/120/230	5	——	——	E26/E27/B22	φ 60*110
HLLEDA19/O-5W	90-260/120/230	5	——	——	E26/E27/B22	φ 60*110



Features

- High quality driver with minimized flickering
- High quality body materials with improved heat dissipation
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty




Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDJDR-3W	90-260/120/230	3	200~250	2700~6500	E26/E27	φ 50*54
HLLEDJDR-5W	90-260/120/230	5	300~350	2700~6500	E26/E27	φ 50*54
HLLEDJDR-6W	90-260/120/230	6	400~450	2700~6500	E26/E27	φ 50*54
HLLEDJDR-7W	90-260/120/230	7	500~550	2700~6500	E26/E27	φ 50*54
HLLEDJDR-5W1	110-240	5	350	3000	E27	φ 50*58
HLLEDJDR-7W1	110-240	7	500	6500	E27	φ 50*58

PAR Series with Adjustable Angle



Features

- Adjustable beam angle by 30°, 60° or 100°
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty




Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDPAR20ADJ-6W	90-260/120/230	5~6	450~510	2700~6500	E26/E27/B22	φ 64*86
HLLEDPAR30SADJ-8.3W	90-260/120/230	8.3	700~750	2700~6500	E26/E27/B22	φ 95*92
HLLEDPAR30ADJ-10W	90-260/120/230	8.3~10	750~810	2700~6500	E26/E27/B22	φ 95*122
HLLEDPAR38ADJ-10.5W	90-260/120/230	10.5	950~1050	2700~6500	E26/E27/B22	φ 122*130

PAR Series with Adjustable Angle



Features

- Adjustable beam angle by 30°, 60° or 100°
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDPAR20ADJ-6W-5WAY	90-260/120/230	5~6	450	2700~6500	E26/E27/B22	φ 64*86
HLLEDPAR30ADJ-10W-5WAY	90-260/120/230	8.3~10	750	2700~6500	E26/E27/B22	φ 95*122
HLLEDPAR38ADJ-10.5W-5WAY	90-260/120/230	10.5	950	2700~6500	E26/E27/B22	φ 122*130

Color PAR Series



Features

- LED with advanced tech provide vivid color
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDGEN11-PAR38/R-6W	90-260/120/230	6	—	—	E26/E27/B22	φ 122.5*133.5
HLLEDGEN11-PAR38/G-6W	90-260/120/230	6	—	—	E26/E27/B22	φ 122.5*133.5
HLLEDGEN11-PAR38/B-6W	90-260/120/230	6	—	—	E26/E27/B22	φ 122.5*133.5
HLLEDGEN11-PAR38/Y-6W	90-260/120/230	6	—	—	E26/E27/B22	φ 122.5*133.5
HLLEDGEN11-PAR38/BK-6W	90-260/120/230	6	—	—	E26/E27/B22	φ 122.5*133.5

PAR Series - Gen13



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty




Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDGEN13-PAR16-4.1W	90-260/120/230	4.1	350~400	2700~6500	E26/E27/B22	φ 50*78
HLLEDGEN13-PAR20-5W~7W	90-260/120/230	5~7	450~500	2700~6500	E26/E27/B22	φ 64*86
HLLEDGEN13-PAR30-8.3W	90-260/120/230	8.3	700~800	2700~6500	E26/E27/B22	φ 95*120
HLLEDGEN13-PAR30-10W	90-260/120/230	10	700~800	2700~6500	E26/E27/B22	φ 95*92.5
HLLEDGEN13-PAR30-10W1	90-260/120/230	10	750~810	2700~6500	E26/E27/B22	φ 95*120
HLLEDGEN13-PAR30-12W	90-260/120/230	12	900~950	2700~6500	E26/E27/B22	φ 95*120
HLLEDGEN13-PAR38-11.1W	90-260/120/230	11.1	1000~1100	2700~6500	E26/E27/B22	φ 120*129
HLLEDGEN13-PAR38-12W	90-260/120/230	12	950~1050	2700~6500	E26/E27/B22	φ 122.5*133.5
HLLEDGEN13-PAR38-16W	90-260/120/230	16	1400~1500	2700~6500	E26/E27/B22	φ 122.5*133.5

PAR Series - Gen10



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDGEN10-PAR20-6W	90-260/120/230	6	450~500	2700~6500	E26/E27/B22	φ 63*84
HLLEDGEN10-PAR20-7W	90-260/120/230	7	500~600	2700~6500	E26/E27/B22	φ 63*84
HLLEDGEN10-PAR30-11W	90-260/120/230	11	750~810	2700~6500	E26/E27/B22	φ 95*112
HLLEDGEN10-PAR30-12W	90-260/120/230	12	810~870	2700~6500	E26/E27/B22	φ 95*112
HLLEDGEN10-PAR38-12W	90-260/120/230	12	950~1050	2700~6500	E26/E27/B22	φ 122.5*133.5
HLLEDGEN10-PAR38-14W	90-260/120/230	14	1050~1150	2700~6500	E26/E27/B22	φ 122.5*133.5
HLLEDGEN10-PAR38-16W	90-260/120/230	16	1400~1500	2700~6500	E26/E27/B22	φ 122.5*133.5

PAR Series - PAR36



Features

- Landscape Lighting
- High quality driver with minimized flickering
- High quality chips with glass body
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



IP65

CRI 90+
TRUE COLORS

Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDPAR36-6W	12	6	450	2700-6500	G53	φ 111.4*60

PAR Series - High Power



Features

- High quality driver with minimized flickering
- High quality body materials with improved heat dissipation
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDPAR38-40W	120	40	3750	5000	E26	φ 122*133
HLLEDPAR38-55W	120	55	4600~5000	5000	E26	φ 122*133

BR Series



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLED20-5W	90-260/120/230	5	400~450	2700~6500	E26/E27/B22	φ 62*99
HLLED20-7.2W	90-260/120/230	7.2	600~650	2700~6500	E26/E27/B22	φ 62*99
HLLED30-7.2W	90-260/120/230	7.2	600~650	2700~6500	E26/E27/B22	φ 95*126
HLLED30-8.3W	90-260/120/230	8.3	700~750	2700~6500	E26/E27/B22	φ 95*126
HLLED30-7.2W1	90-260/120/230	7.2	600~650	2700~6500	E26/E27/B22	φ 95*127
HLLED30-8.3W1	90-260/120/230	8.3	700~750	2700~6500	E26/E27/B22	φ 95*127
HLLED30-9.4W	90-260/120/230	9.4	800~850	2700~6500	E26/E27/B22	φ 95*127
HLLED30-12.2W	90-260/120/230	12.2	1000~1100	2700~6500	E26/E27/B22	φ 95*127
HLLED40-9.4W	90-260/120/230	9.4	800~850	2700~6500	E26/E27/B22	φ 120*161
HLLED40-12.2W	90-260/120/230	12.2	1000~1100	2700~6500	E26/E27/B22	φ 120*161
HLLED40-15.5W	90-260/120/230	15.5	1300~1400	2700~6500	E26/E27/B22	φ 120*161
HLLED40-24W	90-260/120/230	24	1700~1800	2700~6500	E26/E27/B22	φ 120*161

Reflector Series



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDRE39-4W	90-260/120/230	4	300~350	2700~6500	E14/E17/E12/B15D	φ 39*70
HLLEDRE45-4W	90-260/120/230	4	300~350	2700~6500	E26/E27/B22/E17	φ 45*58
HLLEDRE45-4.5W	90-260/120/230	4.5	350~410	2700~6500	E26/E27/B22/E17	φ 45*58
HLLEDRE50-5W	90-260/120/230	5	300~400	2700~6500	E26/E27/B22/ E14/E17/E12/B15D	φ 50*90
HLLEDRE50-6W	90-260/120/230	6	400~460	2700~6500	E26/E27/B22/ E14/E17/E12/B15D	φ 50*90
HLLEDRE50-7W	90-260/120/230	7	500~560	2700~6500	E26/E27/B22/ E14/E17/E12/B15D	φ 50*90
HLLEDRE63-6W	90-260/120/230	5	400~460	2700~6500	E26/E27/B22	φ 63*86.6
HLLEDRE63-6W	90-260/120/230	6	400~460	2700~6500	E26/E27/B22	φ 63*102
HLLEDRE63-7W	90-260/120/230	7	500~560	2700~6500	E26/E27/B22	φ 63*102
HLLEDRE63-9W	90-260/120/230	9	670~720	2700~6500	E26/E27/B22	φ 63*98.5
HLLEDRE80-8W	90-260/120/230	8	600~660	2700~6500	E26/E27/B22	φ 80*114.5
HLLEDRE80-9W	90-260/120/230	9	700~760	2700~6500	E26/E27/B22	φ 80*114.5
HLLEDRE80-10W	90-260/120/230	10	800~860	2700~6500	E26/E27/B22	φ 80*114.5

Reflector Series



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDRE39-4W1	90-260/120/230	4	300~350	2700~6500	E14/E17/E12/B15D	φ 39*70
HLLEDRE45-4W1	90-260/120/230	4	300~350	2700~6500	E26/E27/B22/E17	φ 45*58
HLLEDRE45-4.5W1	90-260/120/230	4.5	350~410	2700~6500	E26/E27/B22/E17	φ 45*58
HLLEDRE50-7W1	90-260/120/230	7	450	2700~6500	E26/E27/B22/ E14/E17/E12/B15D	φ 50*90
HLLEDRE63-6W1	90-260/120/230	6	500	2700~6500	E26/E27/B22	φ 63*102
HLLEDRE63-7W1	90-260/120/230	7	500~560	2700~6500	E26/E27/B22	φ 63*102
HLLEDR63-8W1	90-260/120/230	8	670~720	2700~6500	E26/E27/B22	φ 63*98.5
HLLEDRE80-10W1	90-260/120/230	10	800~860	2700~6500	E26/E27/B22	φ 80*113

Globe Series



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDG45-4W	90-260/120/230	4	250~300	2700~6500	E26 /E27/B22/E17/ E14/E12/B15D	φ 45*80
HLLEDG45-4.5W	90-260/120/230	4.5	300~350	2700~6500	E26 /E27/B22/E17/ E14/E12/B15D	φ 45*80
HLLEDG45-5W	90-260/120/230	5	350~400	2700~6500	E26 /E27/B22/E17/ E14/E12/B15D	φ 45*80
HLLEDG45-7W	90-260/120/230	7	420~470	2700~6500	E26 /E27/B22/E17/ E14/E12/B15D	φ 45*80
HLLEDG50-4W	90-260/120/230	4	250~300	2700~6500	E26/E27/B22/E17/ E14/E12/B15D	φ 50*79
HLLEDG50-4.5W	90-260/120/230	4.5	300~350	2700~6500	E26/E27/B22/E17/ E14/E12/B15D	φ 50*79
HLLEDG50-5W	90-260/120/230	5	350~400	2700~6500	E26/E27/B22/E17/ E14/E12/B15D	φ 50*79
HLLEDG50-6.5W	90-260/120/230	6.5	450~500	2700~6500	E26/E27/B22/E17/ E14/E12/B15D	φ 50*79
HLLEDG50-7.5W	90-260/120/230	7.5	500~560	2700~6500	E26/E27/B22/E17/ E14/E12/B15D	φ 50*79

Globe Series



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDG25-7W	90-260/120/230	7	500~560	2700~6500	E26/E27/B22	φ 80*113
HLLEDG25-8W	90-260/120/230	8	600~660	2700~6500	E26/E27/B22	φ 80*113
HLLEDG25-9W	90-260/120/230	9	650~700	2700~6500	E26/E27/B22	φ 80*113
HLLEDG95-9W	90-260/120/230	9	800~850	2700~6500	E26/E27/B22	φ 95*136
HLLEDG95-10W	90-260/120/230	10	900~950	2700~6500	E26/E27/B22	φ 95*136
HLLEDG95-11W	90-260/120/230	11	1000~1050	2700~6500	E26/E27/B22	φ 95*136
HLLEDG95-12W	90-260/120/230	12	1100~1300	2700~6500	E26/E27/B22	φ 95*136
HLLEDG120-15W	90-260/120/230	15	1400~1500	2700~6500	E26/E27/B22	φ 120*156

2D Tube




Features

- High quality body materials with improved heat dissipation
- High quality driver with minimized flickering
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLED2D-8W	240	8	810	2700~6500	GR8/GR10Q	141*30*138
HLLED2D-14W	230	14	880/1540	2700~4000	GR8/GR10Q	200*31*200

T9/T5 Circular Led

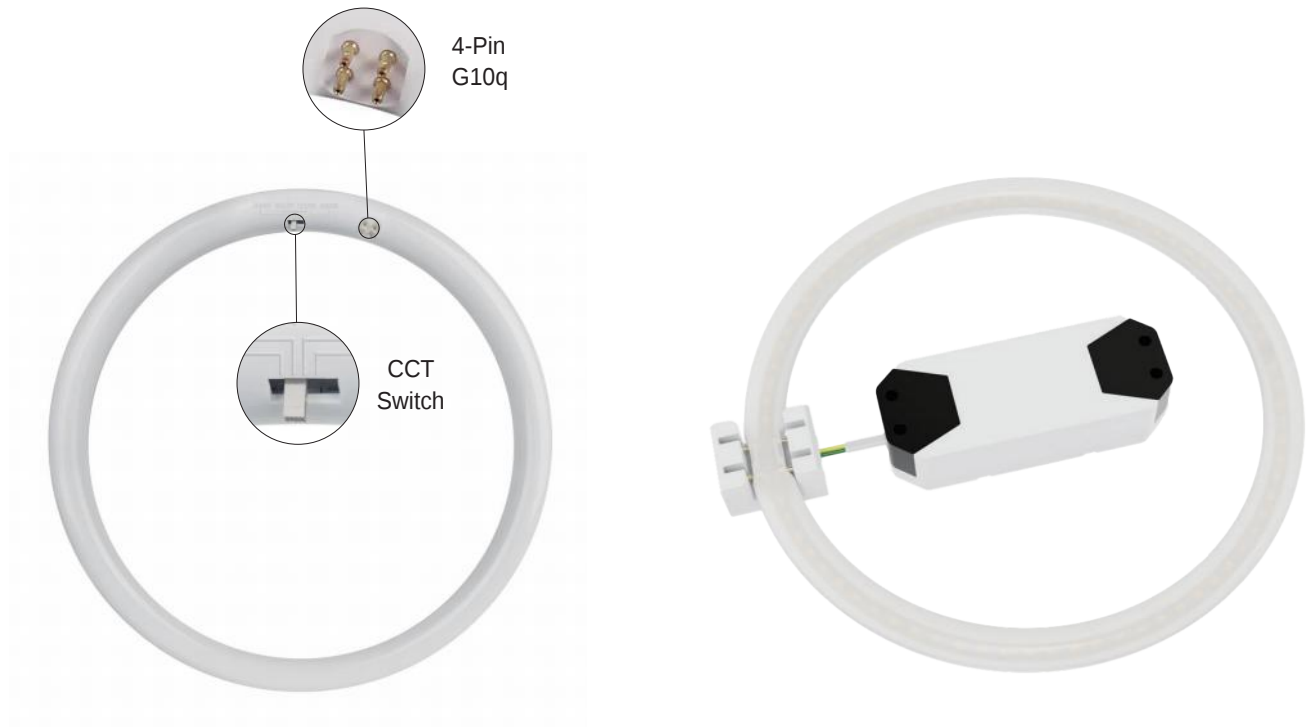

Features

- Replacement for T5/T9 triphosphor circular led
- Easy and quick to install
- No rewiring required
- Uses existing ballast
- Compact circular design maximizes illumination per area
- Flicker-free, instant-on illumination at full brightness
- 3000K, 4000K, 5000K, or 6500K with the flip of a switch on the bulb
- LED technology offers more lumens per watt, saving energy costs over fluorescents



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDT5-18W	230	18W	3350/4300	3000	2GX13	16.5*225
HLLEDT5-30W	230	30W	3350/4300	3000	2GX13	16.5*229
HLLEDT5-36W	230	36W	3350/4300	3000	2GX13	16.5*229
HLLEDT5-40W	230	40W	3350/4300	3000	2GX13	16.5*373
HLLEDT9-25W	120	25W	2950	3000-6000	G109	16*304
HLLEDT9-20W	120	20W	2000	3000-6000	G109	12*304
HLLEDT9-16W	120	16W	1400	3000-6000	G109	8.9*304
HLLEDT9-15W	120	16W	1400	3000-6000	G109	8.5*330



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDUFO-17W	220	17	1615	6500	E27	φ 150*83.5
HLLEDUFO-24W	220	24	2280	6500	E27	φ 175*85.5
HLLEDUFO-36W	220	36	3420	6500	E27	φ 200*97

T Bulb



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDT32-5W	220~240	5	450~510	2700~6500	E26/E27/B22	φ 96.76*32
HLLEDT37-9W	220~240	9	800~900	2700~6500	E26/E27/B22	φ 116*37
HLLEDT45-15W	220~240	15	1500~1600	2700~6500	E26/E27/B22	φ 161.5*43.3
HLLED-STICK-T40	220~240	8-11	880~1210	3000K/4000K/6500K	E27	φ 115*40
HLLED-STICK-T50	220~240	13	1430	3000K/4000K/6500K	E27	φ 160*50

T Bulb



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDT80-20W	90-260/120/230	24	2000	2700~6500	E26/E27	φ 147/149.5*80
HLLEDT100-30W	90-260/120/230	35	2800	2700~6500	E26/E27	φ 171/173.5*100
HLLEDT120-40W	90-260/120/230	40	3600	2700~6500	E26/E27	φ 207.7/210*120
HLLEDT140-50W	90-260/120/230	50	4500	2700~6500	E26/E27	φ 228.5/231*137.5

T Bulb



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLL EDT80-18W1	100~240	18	1800	6000	E26/E27	φ 136*80
HLL EDT80-20W1	90-260/120/230	20	1800	2700~6500	E27	φ 148.2*80
HLL EDT100-28W1	90-260/120/230	28	2800	6000	E26/E27	φ 168*100
HLL EDT100-30W1	90-260/120/230	30	2700	2700~6500	E27	φ 179*100
HLL EDT120-38W1	100~240	38	3800	6000	E26/E27	φ 190*120
HLL EDT120-40W1	90-260/120/230	40	3600	2700~6500	E27	φ 210.5*118
HLL EDT140-48W1	100~240	48	4800	6000	E26/E27	φ 220*140
HLL EDT140-50W1	90-260/120/230	50	4500	2700~6500	E27	φ 238.6*138.6

Downlight



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 25,000H with 3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDR4-6WY-7.2W	120	7.2	650	2700~6500	E26/E27	φ 128*59
HLLEDR4-6WY-8.6W	120	8.6	775	2700~6500	E26/E27	φ 128*59
HLLEDR4-6WY-11.1W	120	11.1	1000	2700~6500	E26/E27	φ 128*59
HLLEDR4-6WY-8.6W	120	6/7.2/8.6	540/650/775	2700~6500	E26/E27	φ 128*59
HLLEDR56H0-6WY-14.3W	120	9.4/11.3/14.3	850/1025/1290	2700~6500	E26/E27	φ 190*64
HLLEDR56-6WY-10.2W	120	10.2	925	2700~6500	E26/E27	φ 190*64
HLLEDR56H0-6WY-14.3W	120	14.3	1290	2700~6500	E26/E27	φ 190*64
HLLEDR56H0-6WY-22.5W	120	22.5	2000	2700~6500	E26/E27	φ 190*64

Downlight



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 25,000 H with 3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDR4-6WY-7.2W	120	7.2	650	2700~6500	E26	φ 120*62
HLLEDR56-6WY-10.2W	120	10.2	925	2700~6500	E26	φ 190*66

Downlight



Features

- 90 degree rotatable
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 25,000H with 3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLED4SCP-6WY-8W	90-260/120/230	8	720	2700~6500	E26/E27/B22	φ 126*78
HLLED56SCP-6WY-9.4W	90-260/120/230	9.4	850	2700~6500	E26/E27/B22	φ 190*95

Downlight




Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 25,000H with 3 years warranty




Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLED4-8W	90-260/120/230	8	500~560	2700~6500	E26/E27/B22	φ 128*58
HLLED4-10W	90-260/120/230	10	600~660	2700~6500	E26/E27/B22	φ 128*58
HLLED4-8W1	90-260/120/230	8	500~560	2700~6500	E26/E27/B22	φ 128*58
HLLED4-10W1	90-260/120/230	10	600~660	2700~6500	E26/E27/B22	φ 128*58
HLLED4-6WY-7.2W	120	7.2	650	2700~6500	E26/E27/B22	φ 128*59
HLLED4-6WY-8.6W	120	8.6	775	2700~6500	E26/E27	φ 128*59
HLLED4-6WY-11.1W	120	11.1	1000	2700~6500	E26/E27	φ 128*59
HLLED4-6WY-8.6W	120	6/7.2/8.6	540/650/775	2700~6500	E26/E27	φ 128*59
HLLED56H0-6WY-14.3W	120	9.4/11.3/14.3	850/1025/1290	2700~6500	E26/E27	φ 190*64
HLLED56-6WY-10.2W	120	10.2	925	2700~6500	E26/E27	φ 190*64
HLLED56H0-6WY-14.3W	120	14.3	1290	2700~6500	E26/E27	φ 190*64
HLLED56H0-6WY-22.5W	120	22.5	2000	2700~6500	E26/E27	φ 190*64

Downlight

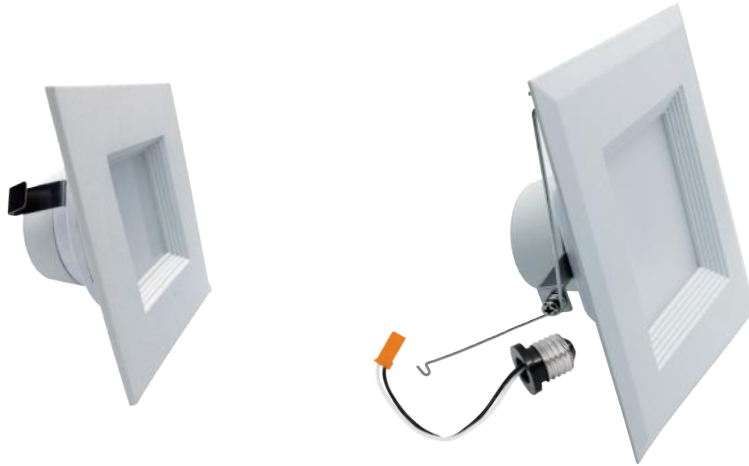

Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 25,000H with 3 years warranty

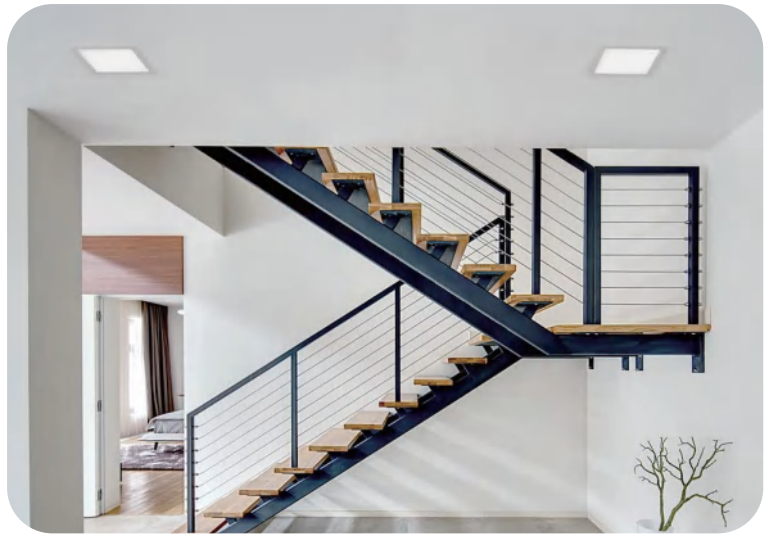


Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDR4-9W1	90-260/120/230	9	500~560	2700~6500	E26/E27/B22	φ 125*125*55
LEDRSQ4-7.7W	120	7.7	700	3000	E26/E27	φ 128*128*55
LEDRSQ4-4WY-9.3W	120	9.3	770	3000~4000~5000	E26/E27	φ 128*128*55
LEDRSQ6-9.4W	120	9.4	850	3000	E26/E27	φ 190*190*70
LEDRSQ6-4WY-12W	120	12	985	3000~4000~5000	E26/E27	φ 190*190*70
HLLEDR6-18W	90-260/120/230	18	1000~1100	2700~6500	E26/E27/B22	φ 190*190*70

Downlight



Features

- Fire resistance
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 25,000H with 3 years warranty

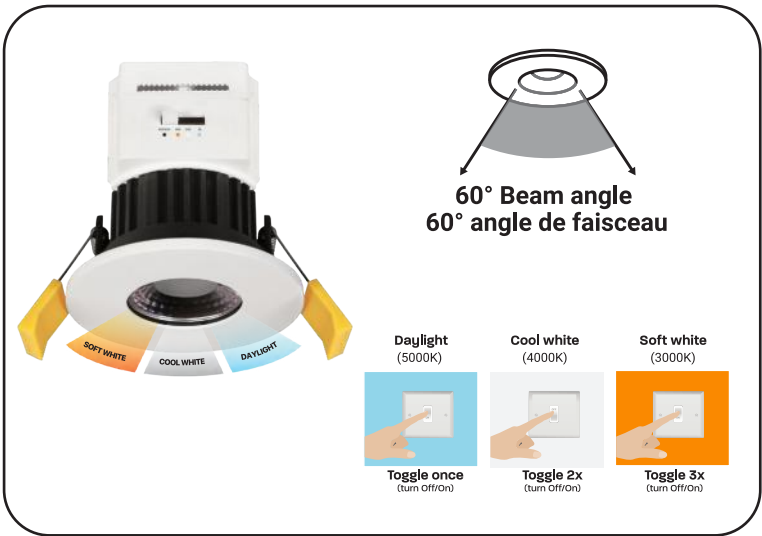

Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLED3-8W	90-260/120/230	8	560~600	3000/4000/5000	—	φ 90*89

Downlight



Features

- Deep gimable with 38deg beam angle
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 25,000H with 3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLED4DG-10W	120	10	700~750	2700~6500	—	φ 120*57

Downlight



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 25,000H with 3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDDL-3W-FP+ALU	220~240	3	270	3000/4000/6500	E26/E27/B22	φ 90*26
HLLEDDL-5W-FP+ALU	220~240	5	450	3000/4000/6500	E26/E27/B22	φ 90*43
HLLEDDL-7W-FP+ALU	220~240	7	630	3000/4000/6500	E26/E27/B22	φ 90*43
HLLEDDL-9W-FP+ALU	220~240	9	810	3000/4000/6500	E26/E27/B22	φ 115*26

Downlight



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 25,000H with 3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDDL-3.5INCH-R	220~240	5~7	800~1120	2700~6500	/	φ 90-100
HLLEDDL-4INCH-R	220~240	9~12	1440~1920	2700~6500	/	φ 110-130
HLLEDDL-6INCH-R	220~240	15~18	2400~2880	2700~6500	/	φ 155-175
HLLEDDL-8INCH-R	220~240	20~24	3200~3840	2700~6500	/	φ 180-210
HLLEDDL-5W-2.5INCH-S	220~240	5	500	2700~6500	/	φ 75
HLLEDDL-7W-3.5INCH-S	220~240	7	700	2700~6500	/	φ 95
HLLEDDL-12W-4INCH-S	220~240	12	1200	2700~6500	/	φ 120
HLLEDDL-15W-6INCH-S	220~240	15	1500	2700~6500	/	φ 140

DOWNLIGHT/WIFI



Features

- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Dimmable option
- Lifetime of 25,000H with 3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
HLLEDR4-WIFI-10.3W	120	10.3	850	RGBW	E26	φ 132.2*77.3
HLLEDR56-WIFI-14.6W	120	14.6	1200	RGBW	E26	φ 192.4*78.2

Night Light

Features

- Low power with nightlight for energy saving
- High quality driver with minimized flickering
- High quality chips with aluminum+PC body and high diffusion cover
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model numbers	voltage (v)	Watt (w)	lumen (lm)	CCT (k)	Cap	Size L*W*H (mm)
a HLLEDPEL(Sensor)	120/230	1	—	—	E26/E27/B22	φ 60*114
b HLLEDNLD(Sensor)	120/230	1	—	—	EU/CN/US	φ 62*47
c HLLEDNLH(Sensor)	120/230	1	—	—	CN/US	φ 59*55
d HLLEDNLS(Sensor)	120/230	1	—	—	CN/US	φ 59*54
e HLLEDNLF(Sensor)	120/230	1	—	—	CN/US	φ 80*45
f HLLEDDNLC(Sensor)	120/230	1	—	—	CN/US	φ 77*63
g HLLEDCHRTR-1(Sensor)	120/230	1	—	—	CN/US	φ 80*122
h HLLEDNLE(Sensor)	120/230	1	—	—	EU/CN/US	φ 50*84
i HLLEDNLC(Sensor)	120/230	1	—	—	EU/CN/US	φ 85/113*51.5
j HLLEDNLA(Sensor)	120/230	1	—	—	EU/CN/US	φ 63*100
k HLLEDNLVB(Sensor)	120/230	1	—	—	CN/US	φ 61*102
l HLLEDNLVA(Sensor)	120/230	1	—	—	CN/US	φ 61*102
m HLLEDNLB(Sensor)	120/230	1	—	—	EU/CN/US	φ 63*102

Beam Light



Features

- Use high quality chips in ALU+PC body with high diffusion PC cover
- Lifetime of 15,000H~25,000H with 2-3 years warranty
- Features a rotatable medium base
- Equipped with a 2.4G remote control that emits RGBW beam lighting.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDBL-4W(2.4G)	120	4	—	RGBCW	E26	φ175*120*54	

