



LED

Siro

2026

www.sirogroup.org



Hi-Light Lighting

www.hilight-lighting.com





Xiamen Headquarters 50acres



Zhangzhou factory 210acres



Thailand factory 70acres

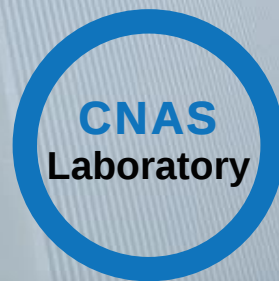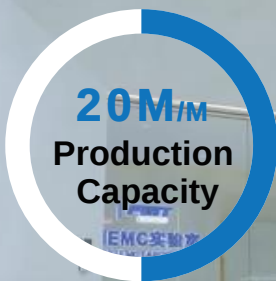

- **SiroBuildex,** founded in 2001, is a national high-tech enterprise, specialized in LED lighting for over 20 years. Headquartered in Xiamen, China, we have three manufacturing bases located in Xiamen and Zhangzhou of China, and Chonburi of Thailand, covering a total area of over 300 acres and nearly 300,000 square meters of production workshops, office buildings, R&D centers and CNAS national standard laboratory. Throughout all these years, we have built an industrial chain integrating innovative research and development, intelligent manufacturing and intelligent lighting solution output. With more than 2,000 employees and a monthly production capacity of over 20 million pieces, we have established long-term and stable cooperative relations with mainstream supermarkets and brands in North America, Europe and Asia-Pacific.

- **Highly-qualified Products**

With our rich ODM/OEM experience and proven performance, we are currently a prominent partner of many world famous lighting brands and large international chain stores. We have customers enjoying our products and service over 60 countries and we are one of the main suppliers of LED, CFL and other lighting products in US market.

- **One-Stop Products Selection**

We have developed a full range of LED lighting products from light bulbs to lighting fixtures, covering over a thousand models, which can meet the demands of different markets around the world. We are confident to provide customers with one-stop LED solutions with accredited quality, capacity and variety.

- **Quality Certification**

As a dual-system certified enterprise (ISO9001, ISO14001), we have established access thresholds covering the global mainstream markets:

- ✓ Safety Certification: UL/CUL/ETL/CE/GS-LVD/PSE
- ✓ Energy Efficiency Certification: ENERGY STAR/DLC/EUP/MEPS
- ✓ Regional Certification: CCC/CQC/KC/SAA/C-Tick
- ✓ Professional Certification: CB/ENEC/NOM/PROCELL

Relying on the intelligent manufacturing system and the CNAS standard laboratory, we ensure that each product complies with the technical specifications of various countries. We have now achieved barrier-free access to major lighting markets such as Europe, America, Asia-Pacific, and Latin America.

Contents

SkyLight	
Ultra-wide Color Gamut	
Oval Panel Light (with Night light)	01
Panel Light (with Night light)	02
Panel Light (with Night light 3 Ways to Install)	03
Downlight (with Night light)	04
Recessed Slim Canless Light (with Night light)	05
Panel Light-Edgelight Color Temperature Selectable	06
Panel Light/Oreo Panel Light	07
Panel Light (Lumen&Color Temperature Selectable)	08
Troffer (North American and EU Standard)	09
Slim Panel Light(North American and EU Standard)	10
Panel Light Color Temperature Selectable	11~13
Panel Light With PIR Sensor	14
Intagrated Recessed Downlight	15
Slim Recessed Light	16
Linkable Slim Recessed Panel Light	17
Backlit Slim Recessed Light	18
Backlit Recessed Light	19
Gimbal Recessed Light	20
360 Degree Gimbal Recessed Light	21
2 Hrs Fire Rated Recessed light	22
Trimless Recessed Light	23
Saturn Backlit Recessed Light	24
Microwave Battery Back-up Reccesed Light	25
Motion Microwave Wrap Light	26~27
Solar Shoplight	28
Slim Integrated T5	29
T8 Tube	30
Low Valtage Undercabinet Light	31
Undercabinet Bar Light	32

Contents

Undercabinet Light Hand wave	33
Undercabinet Bar Light Angled	34
Undercabinet Light ajustable Beam Angle With	35
Undercabinet Panel Light	36
Undercabinet Panel Light	37~38
Undercabinet Light Bar	39
Smart Sensor & Controls	40
2.4G One Sync Product	41~46
Ceiling Light	47~58
Linkable Linear Light	59
Fan Light	60~64
Step Light	65~66
Puck Light	67
Garage Light	68
Landscape Light	69
Work Light	70
Solar Jar Light	71
Flood Light	72~73
Security Light	74
High Bay Lighting	75
Wall Light	76~80
Aquarium Clip Light	81
Mirror Light	82~87
Track Light	88
Street Light	89
Pendant Light	90~92
Table Lamp Marble Base	93

Skylight

Fixture

PATENTED PRODUCT

in UK, Germany, Thailand, Vietnam,
Canada, Mexico, Indonesia and Others

Infuse any room with the bright, airy feel of a skylight. Crafted to replicate natural sunlight, creating a warm and sunny atmosphere that enhances both openness and coziness. Perfect for brightening up spaces with limited windows, they deliver a refreshing, outdoor-inspired glow anywhere in your home. Rain or shine.



8 in. Round
20W, 1000lm, Skylight+5CCT
Recessed
D203mm*35mm



15 in. Round
32W, 1600lm, Skylight+5CCT
Surface Mount
D380mm*55mm



24 in. Oval
45W, 2200lm, Skylight+5CCT
Surface Mount
610mm*340mm*55mm




1 ft. x 2 ft. Rectangle
40W, 2000lm, Skylight+5CCT
Surface Mount
304mm*604mm*52mm




1 ft. x 4 ft. Rectangle
70W, 4000lm, Skylight+5CCT
Surface Mount
304mm*1200mm*52mm



0.5 ft. x 2 ft. Rectangle
20W, 1000lm, Skylight+5CCT
Surface Mount
152mm*604mm*52mm




0.5 ft. x 4 ft. Rectangle
40W, 2000lm, Skylight+5CCT
Surface Mount
152mm*1200mm*52mm

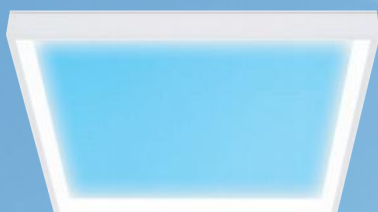

2 ft. x 2 ft. Rectangle
70W, 4000lm, Skylight+5CCT
Recessed
595mm*595mm*32mm



Mode Changing via the Switch

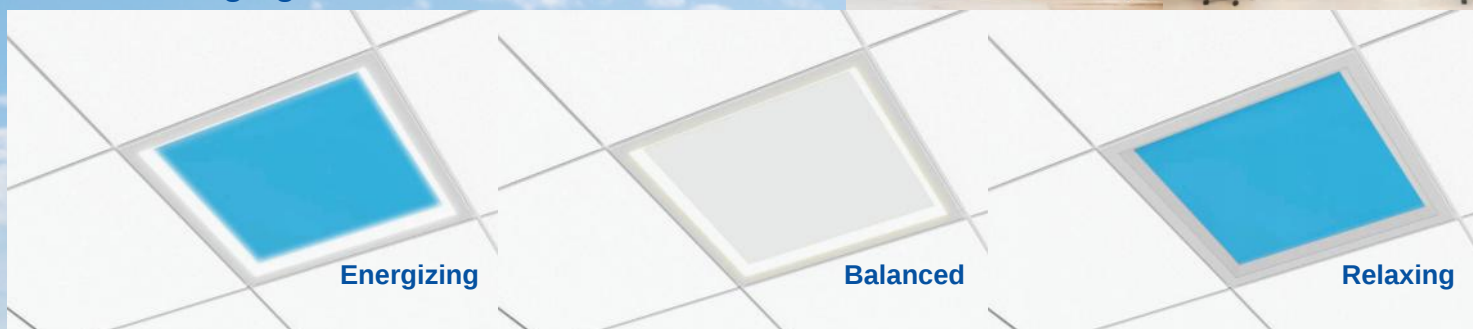

Ultra-wide Color Gamut

Fixture

Infuse any room with the bright, airy feel of a skylight. Crafted to replicate natural sunlight, creating a warm and sunny atmosphere that enhances both openness and coziness. Perfect for brightening up spaces with limited windows, they deliver a refreshing, outdoor-inspired glow anywhere in your home. Rain or shine.



8 in. Round

18W, 1100lm, 1800-12000K, 16 Zones
Recessed
D220mm*32mm



1 ft. x 2 ft. Rectangle

35W, 2000lm, 1800-12000K, 40 Zones
Surface Mount
304mm*604mm*45mm



15 in. Round

42W, 2500lm, 1800-12000K, 48 Zones
Surface Mount
D380mm*45mm



1 ft. x 4 ft. Rectangle

75W, 4000lm, 1800-12000K, 80 Zones
Surface Mount
304mm*1200mm*45mm



18 in. Round

60W, 3500lm, 1800-12000K, 64 Zones
Surface Mount
D457mm*45mm




2 ft. x 2 ft. Rectangle

75W, 4000lm, 1800-12000K, 80 Zones
Recessed
595mm*595mm*45mm




22 in. Round

90W, 5500lm, 1800-12000K, 96 Zones
Surface Mount
D558mm*45mm

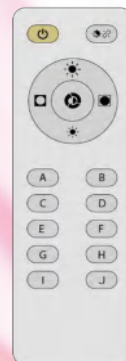

Available in Both Remote and TUYA Options

10 Preset Scenario Modes with One Click

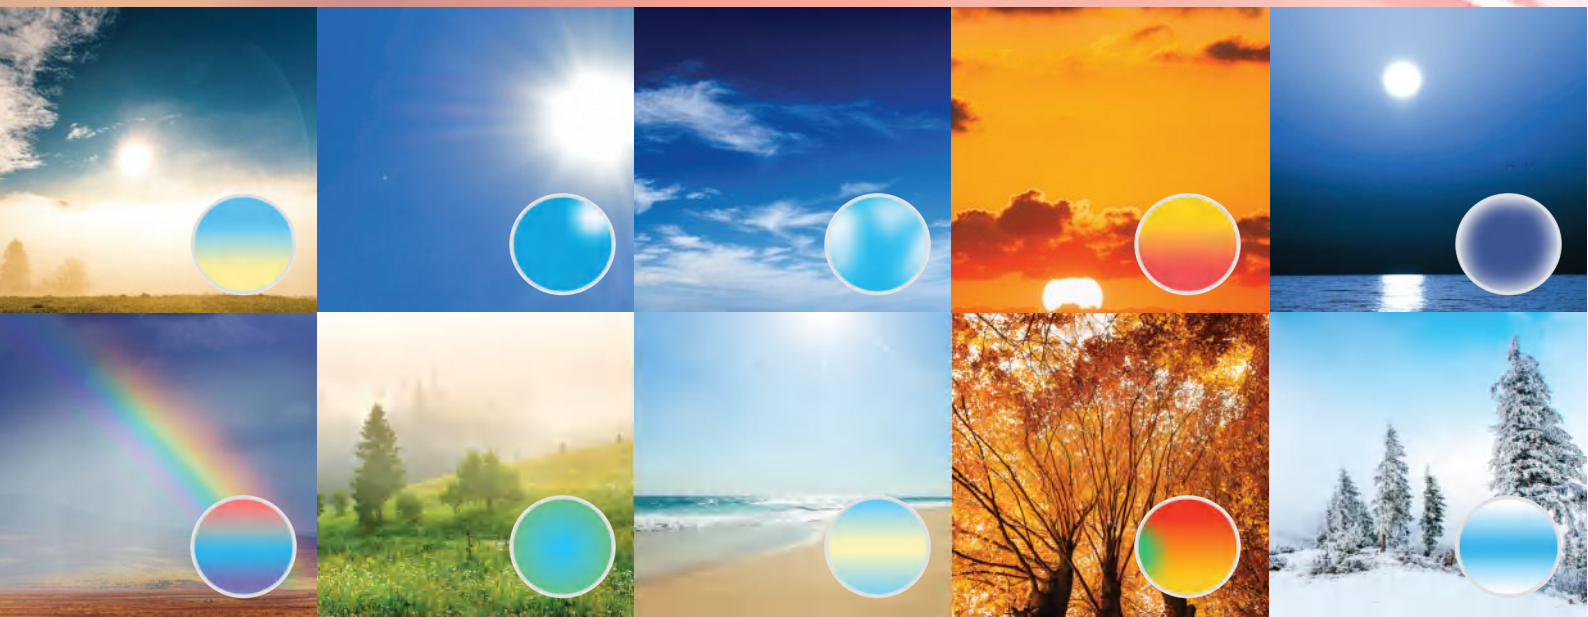

Oval Panel Light (with Night light)



Features

- High quality IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty

Night light mode: Night light mode provides reduced light output at 2200K for very soft illumination at night.

Selectable color temperature: With a simple flip of color switch, you can preset your preferred light color temperature.



FOR NORMAL USE:



TURN ON AND OFF CENTER PRIMARY LIGHT SOURCE USING ANY WALL SWITCH.

FOR NIGHT LIGHT USE:




QUICKLY TOGGLE LIGHT SWITCH ON-OFF-ON TO TURN OFF THE PRIMARY CENTER LIGHT AND TURN ON THE OUTER RING NIGHT LIGHT.

50,000
HOURS

CRI
>80Ra or >90Ra


Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLDEL18NL-30D	90-260/120/230	30	2100	3000~6500	—	461*285*27.5	
HLLDEL32NL-50D	90-260/120/230	50	3500	3000~6500	—	817*459*27.5	

Panel Light (with Night light)

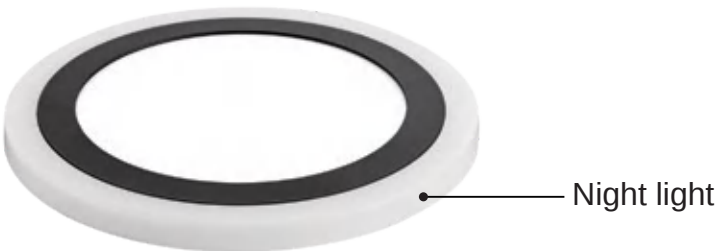

Features

- High quality IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty

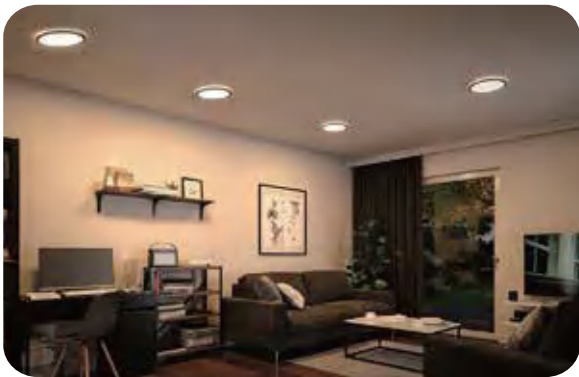

Night light mode: Night light mode provides reduced light output at 2200K for very soft illumination at night.

Selectable color temperature : With a simple flip of color switch, you can preset your preferred light color temperature.

FOR NORMAL USE:



TURN ON AND OFF CENTER PRIMARY LIGHT SOURCE USING ANY WALL SWITCH.



FOR NIGHT LIGHT USE:




QUICKLY TOGGLE LIGHT SWITCH ON-OFF-ON TO TURN OFF THE PRIMARY CENTER LIGHT AND TURN ON THE OUTER RING NIGHT LIGHT.

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDRL13-16D2	90-260/120/230	13	1300~1450	2700~6500	—	φ 330*39	

Panel Light

(with Night light 3 Ways to Install)

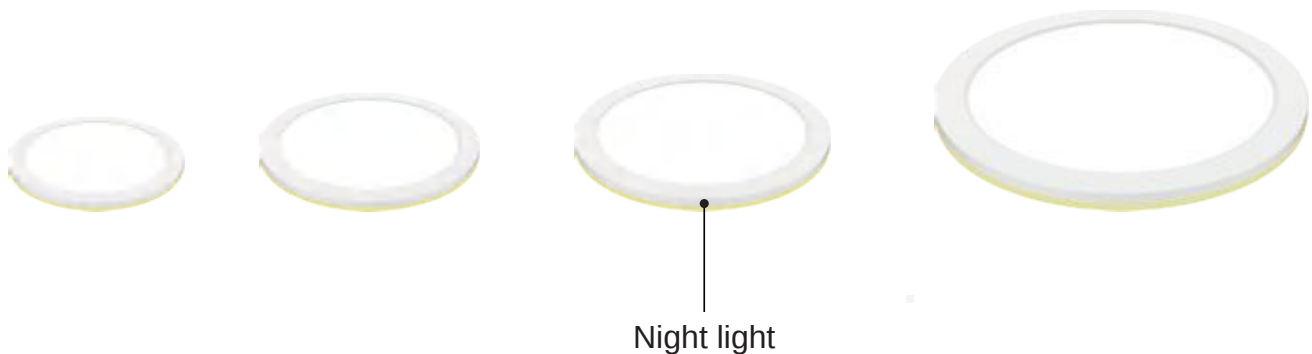

Features

- High quality IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty



Night light mode: Night light mode provides reduced light output at 2200K for very soft illumination at night.

Selectable color temperature : With a simple flip of color switch, you can preset your preferred light color temperature.

3 Ways of Install: This fixture is available to hardwire install, canless install and recessed install.

FOR NORMAL USE:



TURN ON AND OFF CENTER PRIMARY LIGHT SOURCE USING ANY WALL SWITCH.

FOR NIGHT LIGHT USE:



QUICKLY TOGGLE LIGHT SWITCH ON-OFF-ON TO TURN OFF THE PRIMARY CENTER LIGHT AND TURN ON THE OUTER RING NIGHT LIGHT.

50,000
HOURS


CRI
>80Ra or >90Ra

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED5NL-6.5D3	90-260/120/230	6.5	500~600	2700~6500	—	φ 127*58	
HLLED8NL-12D3	90-260/120/230	12	800~900	2700~5000	—	φ 203*58	
HLLED11NL-13D3	90-260/120/230	13	1000~1100	2700~5000	—	φ 280*58	
HLLED13NL-16D3	90-260/120/230	16	1200~1300	2700~6500	—	φ 330*58	
HLLED15NL-22D3	90-260/120/230	22	1550~1650	2700~6500	—	φ 380*58	

*Built-in driver

*Three mounting options: hardwire, canless, and recessed installation.

Downlight (with Night light)

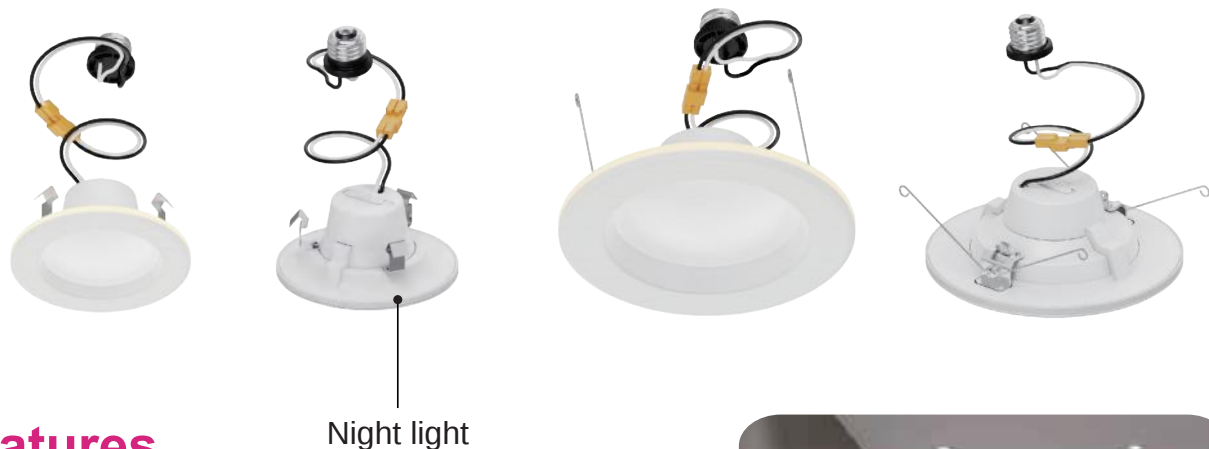

Features

- High quality IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty

Night light mode: Night light mode provides reduced light output at 2200K for very soft illumination at night.

Selectable color temperature: With a simple flip of color switch, you can preset your preferred light color temperature.



FOR NORMAL USE:



TURN ON AND OFF CENTER PRIMARY LIGHT SOURCE USING ANY WALL SWITCH.



FOR NIGHT LIGHT USE:



QUICKLY TOGGLE LIGHT SWITCH ON-OFF-ON TO TURN OFF THE PRIMARY CENTER LIGHT AND TURN ON THE OUTER RING NIGHT LIGHT.

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED4XT-NL-5CCT	90-260/120/230	7.2	650	2700~6500	E26	Φ 125*24	
HLLED6XT-NL-5CCT	90-260/120/ 30	10.2	925	2700~6500	E26	Φ 180*26	

Recessed Slim Canless Light (with Night light)




Features

- High quality IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty

Night light mode: Night light mode provides reduced light output at 2200K for very soft illumination at night.

Selectable color temperature : With a simple flip of color switch, you can preset your preferred light color temperature.

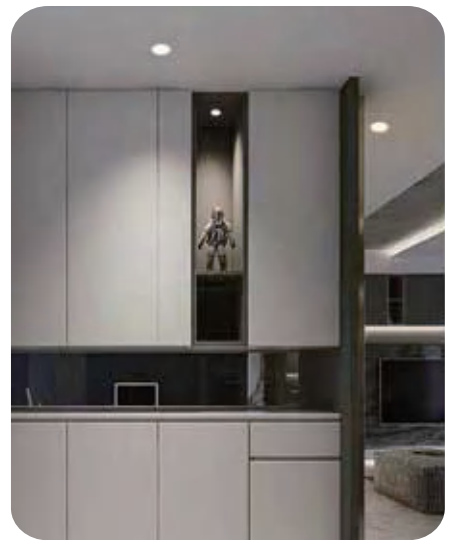

FOR NORMAL USE:



TURN ON AND OFF CENTER PRIMARY LIGHT SOURCE USING ANY WALL SWITCH.



FOR NIGHT LIGHT USE:



QUICKLY TOGGLE LIGHT SWITCH ON-OFF-ON TO TURN OFF THE PRIMARY CENTER LIGHT AND TURN ON THE OUTER RING NIGHT LIGHT.

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED4-NL-7.2	90-260/120/230	7.2	850	2700~6500	—	Φ 125*26	
HLLED56-NL-11.1	90-260/120/230	11.1	1200	2700~6500	—	Φ 180*26	

Warm White

Neutral White

Cool White


Daylight

Daylight Deluxe

Auto

Panel Light - Edgelight

Color Temperature Selectable

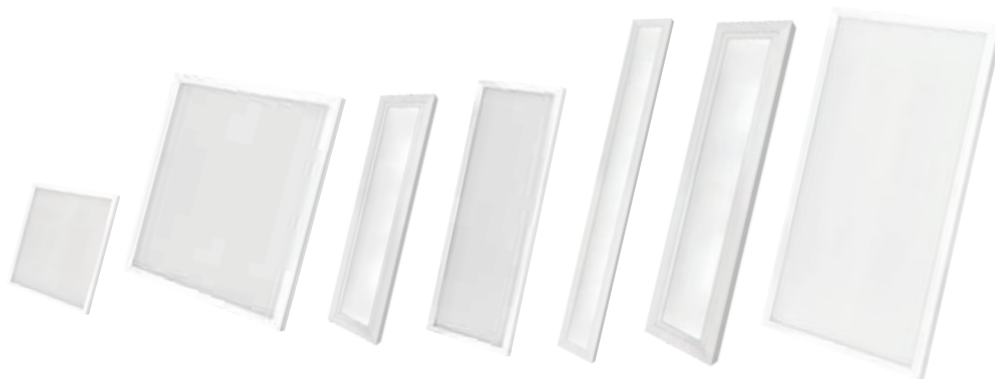

Features

- High quality IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty

Selectable color temperature : With a simple flip of color switch, you can preset your preferred light color temperature.

AUTO function: Flip the switch to AUTO position to change CCT by wall switch per your desire.

50,000
HOURS

CRI
>80Ra or >90Ra

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED1x4-48Q	90-260/120/230	48	3800~4000	2700~6500	—	1233*337*25	
HLLED1x4-50W	90-260/120/230	50	4000	3000~5000	—	304*1200*29.5	
HLLED0.5X2-12.5C	90-260/120/230	12.5	950~1020	2700~6500	—	152*604*25	
HLLED0.5X4-25C	90-260/120/230	25	1900~2100	2700~6500	—	152*1200*25	
HLLED1X1-11C	90-260/120/230	11	800~860	2700~6500	—	304*304*25	
HLLED1X2-25C	90-260/120/230	25	2000~2500	2700~6500	—	304*604*25	
HLLED1X4-50C	90-260/120/230	50	4000~4200	2700~6500	—	304*1200*25	
HLLED2X2-48C	90-260/120/230	48	4250~4450	2700~6500	—	604*604*25	
HLLED2X4-52C	90-260/120/230	52	4500~5000	2700~6500	—	604*1215*25	

*Built-in driver



Warm White

Neutral White

Cool White


Daylight

Daylight Deluxe

Auto

Trimless Panel Light

Color Temperature Selectable



Oreo Panel Light

Color Temperature Selectable



Features

- High quality IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty



Selectable color temperature: With a simple flip of color switch, you can preset your preferred light color temperature.

AUTO function: Flip the switch to AUTO position to change CCT by wall switch per your desire.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED1x4-50W-D	90-260/120/230	50	4000	3000-5000	—	1203*304*37.5	
HLLED1x4-50W-F	90-260/120/230	50	4000	3000-5000	—	1203*304*35.5	

Warm White

Neutral White

Cool White

Daylight

Daylight Deluxe

Auto

Panel Light

(Lumen&Color Temperature Selectable)



Features

- Flicker-Free& Anti-Glare
- Selectable wattage-5 level
- Selectable Color Temperature (2700K~6500K)
- 0-10V Dimming
- Option PIR Sensor

Selectable color temperature : With a simple flip of color switch, you can preset your preferred light color temperature.

AUTO function: Flip the switch to AUTO position to change CCT by wall switch per your desire.



50,000 HOURS

CRI >80Ra or >90Ra

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED1x4-80W-E	120-347	30/35/40/50/80	3750/4375/5000/6250/10000	3000-6000	—	1212*304*34	
HLLED2x2-80W-E	120-347	30/35/40/50/80	3750/4375/5000/6250/10000	3000-6000	—	603*603*34	
HLLED2x4-125W-E	120-347	30/40/50/80/125	3750/5000/6250/10000/15625	3000-6000	—	1212*603*34	

Warm White

Neutral White

Cool White

Daylight

Daylight Deluxe

Auto

Troffer (North American and EU Standard) Color Temperature Selectable



Features

- High quality IC driver with minimized flickering
- Backlit technology to provide better cost and lighter weight
- Dimmable option (0~10V)
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty

Selectable color temperature: With a simple flip of color switch, you can preset your preferred light color temperature.

AUTO function: Flip the switch to AUTO position to enable you to change CCT by wall switch per your desire.

Microwave function available: The built-in microwave motion sensor enables you to save energy at unmanned environment.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLDTR1X4-40W-NA	100-277/120/230	40	4000-4200	3000~6500	—	303*1213*46.5	
HLLDTR2X2-40W-NA	100-277/120/230	40	4000-4200	3000~6500	—	603*603*46.5	
HLLDTR2X4-45W-NA	100-277/120/230	45	4500-5000	3000~6500	—	603*1213*46.5	
HLLDTR1X4-40W-EU	90-260/120/230	40	4000-4200	3000~6500	—	295*1195*34	
HLLDTR2X2-40W-EU	90-260/120/230	40	4000-4200	3000~6500	—	595*595*34	
HLLDTR2X4-45W-EU	90-260/120/230	45	4500-5000	3000~6500	—	595*1195*34	

*Backlit Panel Light with Microwave Motion Sensor.

Warm White

Neutral White

Cool White

Daylight


Daylight Deluxe

Auto

Slim Panel Light

(North American and EU Standard)

Color Temperature Selectable

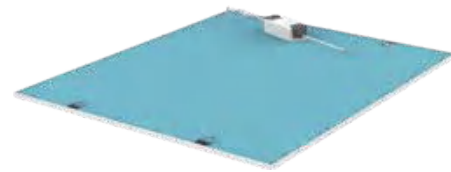


Features

- High quality IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty

Selectable color temperature: With a simple flip of color switch, you can preset your preferred light color temperature.

AUTO function: Flip the switch to AUTO position to enable you to change

CCT by wall switch per your desire.

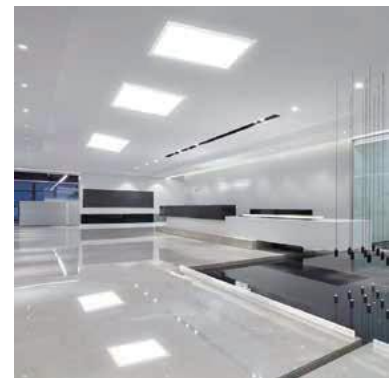

50,000
HOURS

CRI
>80Ra or >90

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLD1X1-12C-NA	90-260/120/230	12	1000~1200	2700~6500	—	303*303*35	
HLLD2X2-53C-NA	90-260/120/230	53	4500~5300	2700~6500	—	603*603*35	
HLLD1X2-25C-NA	90-260/120/230	25	2000~2500	2700~6500	—	303*603*35	
HLLD1X2-25C-NA	90-260/120/230	25	2000~2500	2700~6500	—	303*603*35	
HLLD1X4-53C-NA	90-260/120/230	53	4500~5300	2700~6500	—	303*1213*35	
HLLD2X4-60C-NA	90-260/120/230	60	6000~6600	2700~6500	—	603*1213*35	
HLLD295X1195-12C-EU	90-260/120/230	12	1000~1200	2700~6500	—	295*1195*10	
HLLD595X595-45C-EU	90-260/120/230	45	4000~4500	2700~6500	—	595*595*10	
HLLD595X1195-45C-EU	90-260/120/230	45	4000~4500	2700~6500	—	595*1195*10	

*External driver

Warm White

Neutral White

Cool White

Daylight

Daylight Deluxe

Auto

Panel Light

Color Temperature Selectable



Features

- High quality IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty


Selectable color temperature : With a simple flip of color switch, you can preset your preferred light color temperature.

AUTO function: Flip the switch to AUTO position to enable you to change CCT by wall switch per your desire.

How to Select Your Light Color


Option 1: Pick your favorite light color before installing

If you prefer just one color, select it on the fixture before installation.

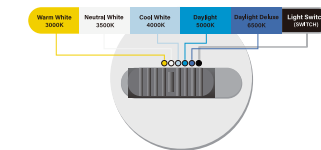

Option 2: Adjust your light color anytime with a regular wall light switch

Select SWITCH on the light fixture before installing and you can choose a light color by toggling your existing wall switch anytime you want.

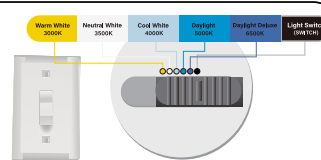

50,000
HOURS

CRI
>80Ra or>90Ra

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED11-6WY-12C1	90-260/120/230	12	900~1000	2700~6500	—	Φ 280*25.5	
HLLED13-6WY-16C11	90-260/120/230	16	1100~1250	2700~6500	—	Φ 330*25.5	
HLLED15-6WY-23C	90-260/120/230	23	1650~1900	2700~6500	—	Φ 380*25.5	
HLLED19-6WY-25C1	90-260/120/230	25	2200~2400	2700~6500	—	Φ 480*25.5	

Warm White

Neutral White

Cool White

Daylight

Daylight Deluxe

Auto

Panel Light

Color Temperature Selectable



Features

- High quality IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty

Selectable color temperature: With a simple flip of color switch, you can preset your preferred light color temperature.


AUTO function: Flip the switch to AUTO position to enable you to change CCT by wall switch per your desire.

50,000
HOURS


CRI
>80Ra or >90Ra



R5/6



R4



CEILING

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDR5-6WY-8C	90-260/120/230	8	500~600	2700~6500	—	Φ 127*30	
HLLEDR7.5-6WY-12C	90-260/120/230	12	800~900	2700~6500	—	Φ 190*30	
HLLEDR11-6WY-26C	90-260/120/230	26	950~1050	2700~6500	—	Φ 280*36	
HLLEDR14-6WY-21C	90-260/120/230	21	1750	3000-6500	—	Φ 355*23	
HLLEDR18-6WY-30C	90-260/120/230	30	2100	3000-6500	—	Φ 457*43	
HLLEDR25-6WY-36C	90-260/120/230	36	2500	3000-6500	—	Φ 636*44	
HLLEDQ5-6WY-8C	90-260/120/230	8	500~600	2700~6500	—	Φ 127*30	
HLLEDQ7.5-6WY-12C	90-260/120/230	12	800~900	2700~6500	—	Φ 190*30	
HLLEDQ11-6WY-26C	90-260/120/230	26	950~1050	2700~6500	—	Φ 280*36	

*Built in driver

Warm White

Neutral White

Cool White

Daylight

Daylight Deluxe

Auto

Panel Light


Color Temperature Selectable



Features

- High quality IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty

Full Plastic Slim Panel light, 6 CCT to choose from

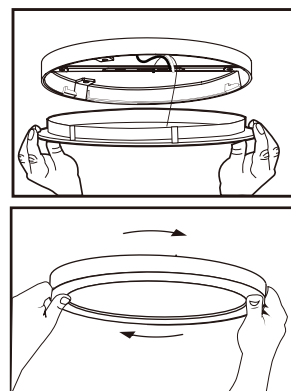

50,000
HOURS

CRI
>80Ra or >90Ra

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDFL-6WY-8W	120V	8	500	2700-6500	—	Φ 154*25	
HLLEDFL-6WY-10W	120V	10	800	2700-6500	—	Φ 200*25	
HLLEDFL-6WY-13.4W	120V	13.4	1100	2700-6500	—	Φ 275*25	
HLLEDFL-6WY-18.2W	120V	18.2	1500	2700-6500	—	Φ 366*25	

*Built-in driver

Warm White

Neutral White

Cool White

Daylight

Daylight Deluxe

Auto

Panel Light With PIR Sensor

Color Temperature Selectable



Features

- High quality IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty

Selectable color temperature: With a simple flip of color switch, you can preset your preferred light color temperature.

AUTO function: Flip the switch to AUTO position to enable you to change

CCT by wall switch per your desire.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED5-PIR-A1	90-260/120/230	8	500	2700~6500	—	Φ 127*30	
HLLED7.5-PIR-A2	90-260/120/230	10	800	2700~6500	—	Φ 190*30	
HLLED11-PIR-A3	90-260/120/230	12	1100	2700~6500	—	Φ 280*36	

*Built-in driver

Warm White

Neutral White

Cool White

Daylight

Daylight Deluxe

Auto

Intagrated Recessed Downlight

Color Temperature Selectable



Features

- High quality IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty

Selectable color temperature: With a simple flip of color switch, you can preset your preferred light color temperature.

AUTO function: Flip the switch to AUTO position to enable you to change CCT by wall switch per your desire.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED4-6WY-10Z1	90-260/120/230	12.5	800~900	2700~6500	—	Φ 127*48	
HLLED56-6WY-17Z2	90-260/120/230	17	1150~1250	2700~6500	—	Φ 180*48.5	
HLLED4XT-6WY-10.25W	120	10.25	850	2700~3500	—	Φ 127*48	
HLLED56XT-6WY-14.25W	120	14.25	1200	2700~3500	—	Φ 180*48	



Slim Recessed Light

Color Temperature Selectable



Features

- High quality IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Linkable up to 12 units with one driver



Selectable color temperature : With a simple flip of color switch, you can preset your preferred light color temperature.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED3XT-8W	90-260/120/230	8	500	2700~6500	—	φ 90*26	
HLLED4XT-9W	90-260/120/230	9	540	2700~6500	—	φ 125*26	
HLLED4XT-12W	90-260/120/230	12	750	2700~6500	—	φ 125*26	
HLLED6XT-13W	90-260/120/230	13	850	2700~6500	—	φ 180*26	
HLLED6XT-18W	90-260/120/230	18	1200	2700~6500	—	φ 180*26	
HLLED8XT-18W	90-260/120/230	18	1200	2700~6500	—	φ 221*26	
HLLED6XLV-6WY-6KIT	90-260/120/230	12	850	3000-5000	—	φ 180*350	



Linkable Slim Recessed Panel Light

Color Temperature Selectable



Features

- High quality IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty



Selectable color temperature : With a simple flip of color switch, you can preset your preferred light color temperature

25,000
HOURS

CRI
>80Ra or >90Ra

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED12XT-6WY-15W	90-260/120/230	15	1000	2700~6500	—	315*26*122	
HLLED36LXT-6WY-15W	90-260/120/230	15	3000	2700~6500	—	915*26*122	
HLLED12LXT-6WY-15W	90-260/120/230	15	2000	2700~6500	—	316*26*126	



Backlit Slim Recessed Light

Color Temperature Selectable



Features

- High quality IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty

Selectable color temperature With a simple flip of color switch, you can preset your preferred light color temperature.




Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDR4XTP-5CCT -5.4W	90-260/120/230	5.4	450	2700-6500	—	Φ 125*29	
HLLEDR6XTP-5CCT -7.9W	90-260/120/230	7.9	650	2700-6500	—	Φ 180*29	



Backlit Recessed Light

Color Temperature Selectable

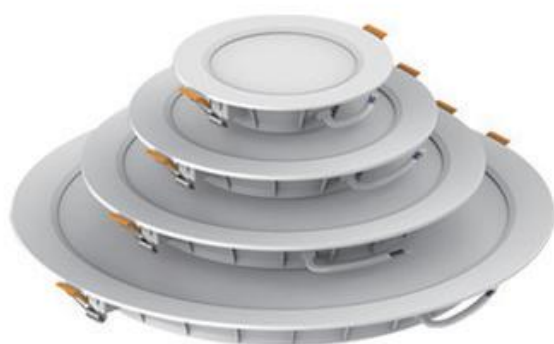

Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDDL-6W	5	6	180	3000~6000	—	121*121*29	
HLLEDDL-12W	5	12	360	3000~6000	—	169*169*29	
HLLEDDL-18W	5	18	550	3000~6000	—	218*218*29	
HLLEDDL-24W	5	24	750	3000~6000	—	296*296*29	



Soft White - 2700K



Warm White - 3000K



Cool White - 4000K



Daylight - 5000K



Cool Daylight - 6500K

Gimbal Recessed Light

Color Temperature Selectable



Features

- High quality IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty

Selectable color temperature: With a simple flip of color switch, you can preset your preferred light color temperature.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED3XT-ADJ-8W	90-260/120/230	8	500	2700~6500	—	φ 90*43	
HLLED4XT-ADJ-11W	90-260/120/230	11	700	2700~6500	—	φ 125*46	
HLLED6XT-ADJ-13W	90-260/120/230	13	850	2700~6500	—	φ 180*66	



360 Degree Gimbal Recessed Light

Color Temperature Selectable



Features

- High quality IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty

Selectable color temperature: With a simple flip of color switch, you can preset your preferred light color temperature.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDR4XT-8A	120	8	500	3000~5000	—	φ 90*28	
HLLEDR4XT-10A	120	10	750	3000~5000	—	φ 125.5*36	
HLLEDR6XT-13A	120	13	850	3000~5000	—	φ 180*50	



2 Hrs Fire Rated Recessed light

Color Temperature Selectable



Features

- High quality IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Tested To Comply With :UL 263,ASTM E119& CAN/ULC S101



Selectable color temperature: With a simple flip of color switch, you can preset your preferred light color temperature.

2 HR Fire Rated

50,000
HOURS

CRI
>80Ra or>90Ra

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED4F-6WAY-6.5W	90-260/120/230	6.5	540	2700-5000	—	Φ 125*58	
HLLED6F-6WAY-10.3W	90-260/120/230	10.3	850	2700-5000	—	Φ 180*58	
HLLED4F-ADJ-5CCT -10W	90-260/120/230	10	750	2700-6500	—	Φ 125*68	



Trimless Recessed Light

Color Temperature Selectable



Features

- High quality IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty

Selectable color temperature : With a simple flip of color switch, you can preset your preferred light color temperature.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED4XT-HO-12W	90-260/120/230	12	750	2700~6500	—	Φ 114.6*38.3	
HLLED6XT-HO-18W	90-260/120/230	18	1200	2700~6500	—	Φ 165.6*38.3	
HLLED3XT-HO-8W	90-260/120/230	8	500	2700~6500	—	Φ 88/100*59.7	



Saturn Backlit Recessed Light

Color Temperature Selectable



Features

- High quality IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty

Selectable color temperature: With a simple flip of color switch, you can preset your preferred light color temperature.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDSBWR4-5CCT-6W	90-260/120/230	6	540	2700-6500	—	Φ 125*46	
HLLEDSBWR6-5CCT -9.4W	90-260/120/230	9.4	850	2700-6500	—	Φ 180*50.8	



Microwave Battery Back-up Recessed Light Color Temperature Selectable



Features

- High quality IC driver with minimized flickering
- Backlit technology to provide great lighting
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty

6" Motion Sensor panel light,suitable for emergency use,
6CCT Selectable Color Temperature and HIGH CRI



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED6-9W(EM)	120	9	850	2700-5000	—	Φ 180*30	
HLLED6-10W(EM)	120	10	850	2700-5000	—	Φ 180*26	
HLLED6-9.4W(EM)	120	9.4	850	2700-6500	—	Φ 180*53	

Motion Microwave Wrap Light




Features

- High quality IC driver with minimized flickering
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Convertible: for Plug-in & hardwire install.

Microwave function: Built-in microwave motion sensor enable you to save energy at unmanned environment with 5 options of distance detection.

IR remote control: Control the fixture by remote with timer, detection range and dimming levels.

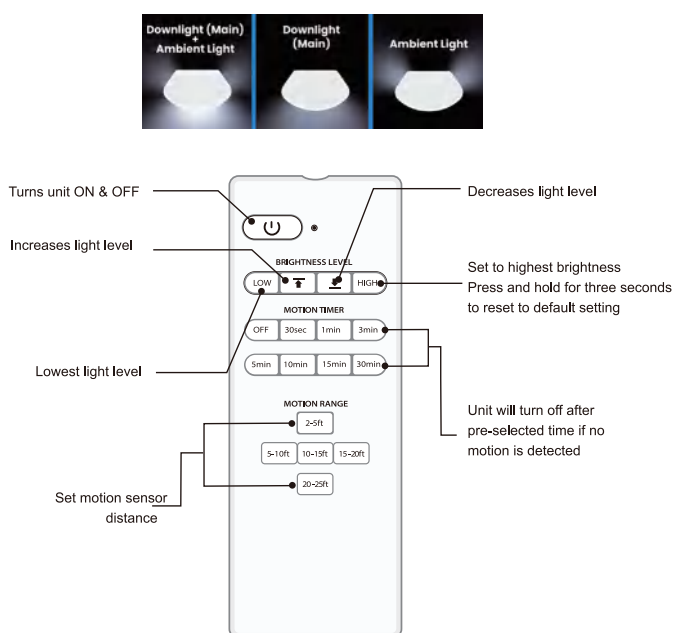

40,000 HOURS

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED-SHOPLIGH-55A	120/230	55	5000	4000	—	609*76*127	
HLLED-SHOPLIGH-60A	120/230	60	6000	4000	—	609*76*127	
HLLED-SHOPLIGH-80A	120/230	80	8000	4000	—	609*76*127	
HLLED-SHOPLIGH-100A	120/230	100	10000	4000	—	609*76*127	

Motion Microwave Wrap Light




Features

- High quality IC driver with minimized flickering
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Convertible: for Plug-in & hardwire install.

Microwave function: Built-in microwave motion sensor enable you to save energy at unmanned environment with 5 options of distance detection.

IR remote control: Control the fixture by remote with timer, detection range and dimming levels.

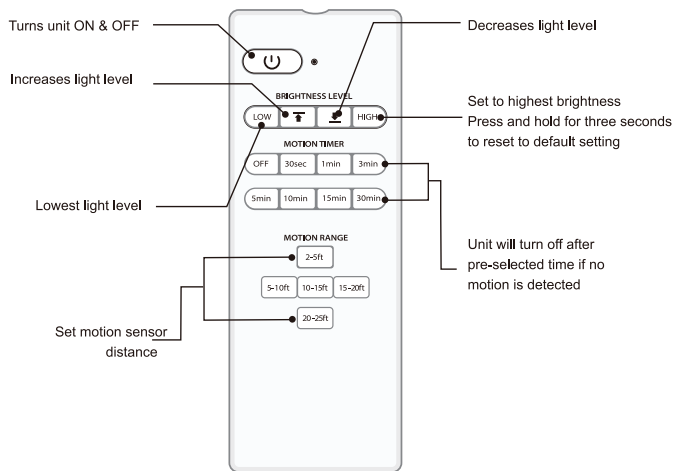

40,000 HOURS

IP65

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED-SHOPLIGH-55 B	120	55	5000	4000	—	1168*77*127	
HLLED-SHOPLIGH-27	120	27	2500	4000	—	610*77*127	

Solar Shoplight



Features

- High quality IC driver with minimized flickering
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Plug-in installation only.
- IP65
- 6 hours of operation with full charge
- Turns off after 1 minute without motion.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDPL-10	5	5	1500~3500	4000	—	900*56.3*44	


*Battery:3x18650

Slim Integrated T5



Features

- High quality IC driver with minimized flickering
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Full plastic

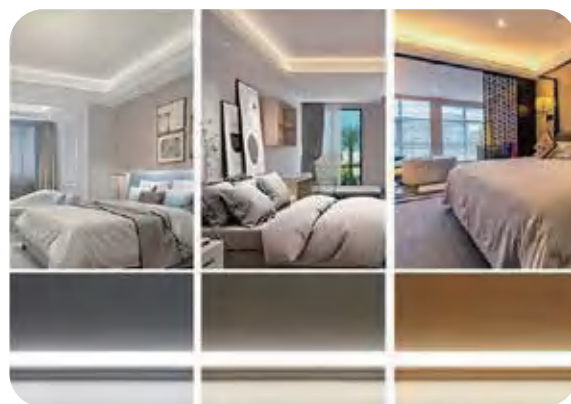

40,000
HOURS

CRI80

Full plastic

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDT5-5C1	90-260/120/230	5	500~600	2700~6500	G5	φ 32*300	
HLLEDT5-9C1	90-260/120/230	9	800~900	2700~6500	G5	φ 32*600	
HLLEDT5-12C1	90-260/120/230	12	1200~1300	2700~6500	G5	φ 32*900	
HLLEDT5-18C1	90-260/120/230	18	1800~2000	2700~6500	G5	φ 32*1200	
HLLEDT5-25C1	90-260/120/230	25	2500~2600	2700~6500	G5	φ 32*1500	
HLLEDT5-36C1	90-260/120/230	36	3600~3800	2700~6500	G5	φ 32*2400	
HLLEDT5-5C3	90-260/120/230	5	500	3000~5000	—	φ 150*23*17	
HLLEDT5-9C3	90-260/120/230	9	900	3000~5000	—	φ 600*23*17	
HLLEDT5-13C3	90-260/120/230	13	1300	3000~5000	—	φ 900*23*17	
HLLEDT5-18C3	90-260/120/230	18	1800	3000~5000	—	φ 1200*23*17	

T8 Tube



Features

- High quality IC driver with minimized flickering
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Full plastic, glass and aluminum all available



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDT8-9C2	90-260/120/230	9	800~900	3000~5000	—	Φ 30.5*606.5	
HLLEDT8-18C2	90-260/120/230	18	1800~2000	3000~5000	—	Φ 30.5*1214.5	
HLLED-Type A Glass-T8	120-277	14	1700	4000	G13	Φ 25.4*1200	
HLLED-Type B Glass-T8	120-277	18	1800	4000	G13	Φ 25.4*1200	
HLLED-Type A +B Glass-T8	120-277	15	1850	4000	G13	Φ 25.4*1200	
HLLED-Type A Glass-T12	120-277	20	1800	4000	G13	Φ 38*1200	

LED Under Cabinet Light Bar 10 inches

400 Lum / 3000K / Dimmable 100%,60%,40%,10%



400 Lumens
Per Light



Combine
end to end




Link with
18 inch cable



Linkable
up to 3

Low Voltage Undercabinet Light

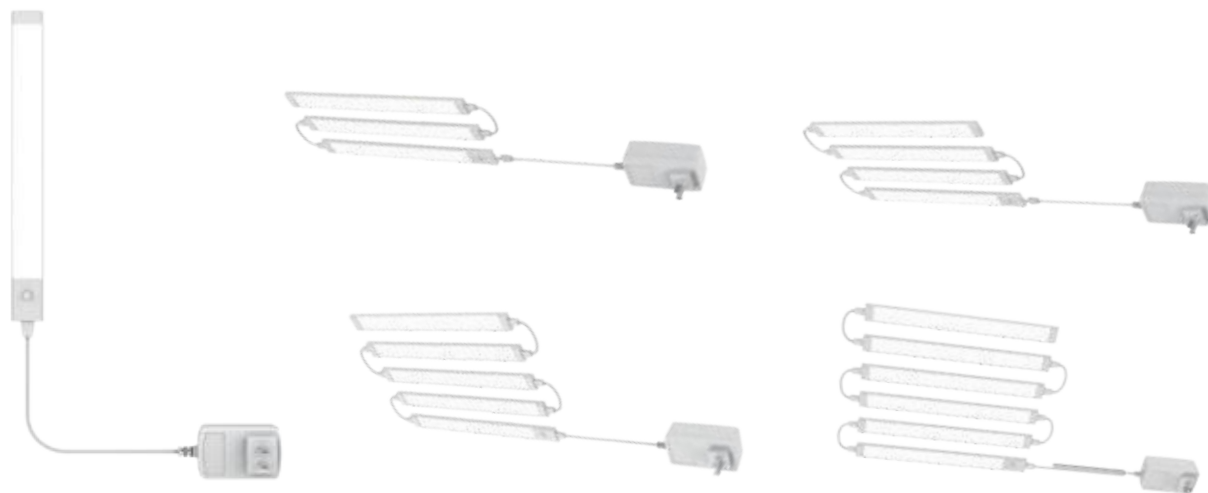

Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Full plastic
- Linkable with slim profile

40,000
HOURS

CRI
>80Ra or >90Ra


Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Single Size (mm)	Dimmable
a HLLLEDUCL10-1-5W	24	5	400	3000	—	256*25.4*8.2	
b HLLLEDUCL10-3-15W	24	15	1200	3000	—	256*25.4*8.2	
c HLLLEDUCL10-4-20W	24	20	1600	3000	—	256*25.4*8.2	
d HLLLEDUCL10-5-25W	24	25	2000	3000	—	256*25.4*8.2	

Undercabinet Bar Light



Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Aluminum
- Detachable battery

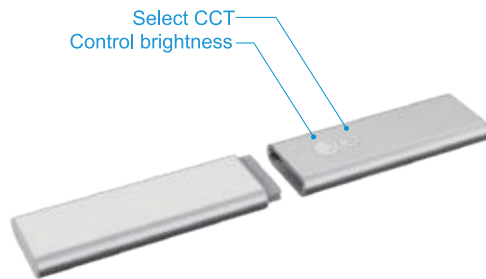

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
Undercabinet Light-12	5	12	500	2700~6500	—	268*49*14	
Undercabinet Light-18	5	18	800	3000~6000	—	420*49*14	
Undercabinet Light-24	5	24	1000	3000~6000	—	572*49*14	
Undercabinet Light-36	5	36	1500	3000~6000	—	876*49*14	

Undercabinet Light Hand wave



Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Hand wave motivated




Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDUCW-5W-A1	5	5	400	5700	—	Φ 450*26	
HLLEDUCW-5W-A2	5	5	240	5700	—	Φ 435*26	
HLLEDUCW-3W-A3	5	3	210	5700	—	Φ 300*24	
HLLEDUCW-6W-A3	5	6	480	5700	—	Φ 600*24	
HLLEDUCW-8W-A3	5	8	550	5700	—	Φ 900*24	

Undercabinet Bar Light Angled



Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Rechargeable and Hardwire version are available



Toggle to adjust -
the beam angle
(5°-85°)



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
Undercabinet Light-12	5	12	500	3000~6000	—	305*23*38	
Undercabinet Light-18	5	18	800	3000~6000	—	457*23*38	
Undercabinet Light-24	5	24	1000	3000~6000	—	610*23*38	
Undercabinet Light-36	5	36	1500	3000~6000	—	914*23*38	

Undercabinet Light adjustable Beam Angle With




Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Adjustable Beam Angle



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
Undercabinet Light-24	5	24	1000	3000~6000	—	800*40*9	

Undercabinet Panel Light

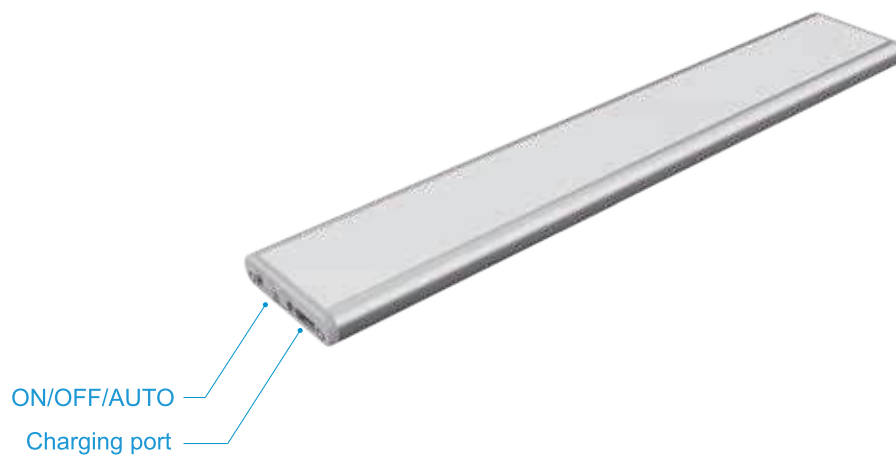


Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Aluminum
- Ultra slim



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
Undercabinet Light-12	5	12	500	3000~6000	—	305*40*9	
Undercabinet Light-18	5	18	800	3000~6000	—	457*40*9	
Undercabinet Light-24	5	24	1000	3000~6000	—	610*40*9	
Undercabinet Light-36	5	36	1500	3000~6000	—	914*40*9	

Undercabinet Panel Light

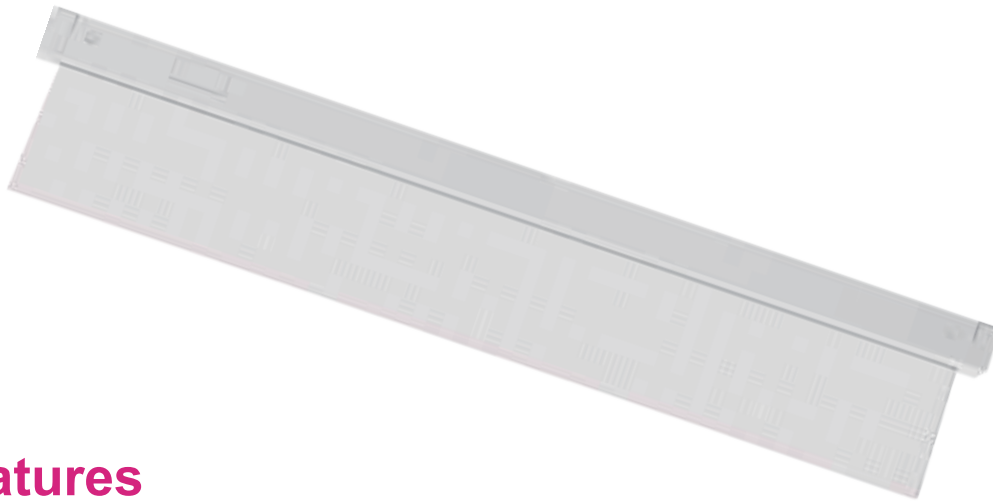


Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Aluminum
- Ultra slim



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED12UCL-FP-A1	120	10	600	2700~6500/RGB	—	274.5*160*25	
HLLED18UCL-FP-A1	120	15	900	2700~6500/RGB	—	405.5*160*25	
HLLED24UCL-FP-A1	120	20	1200	2700~6500/RGB	—	557.5*160*25	
HLLED36UCL-FP-A1	120	28	1700	2700~6500/RGB	—	863.5*160*25	

Undercabinet Panel Light

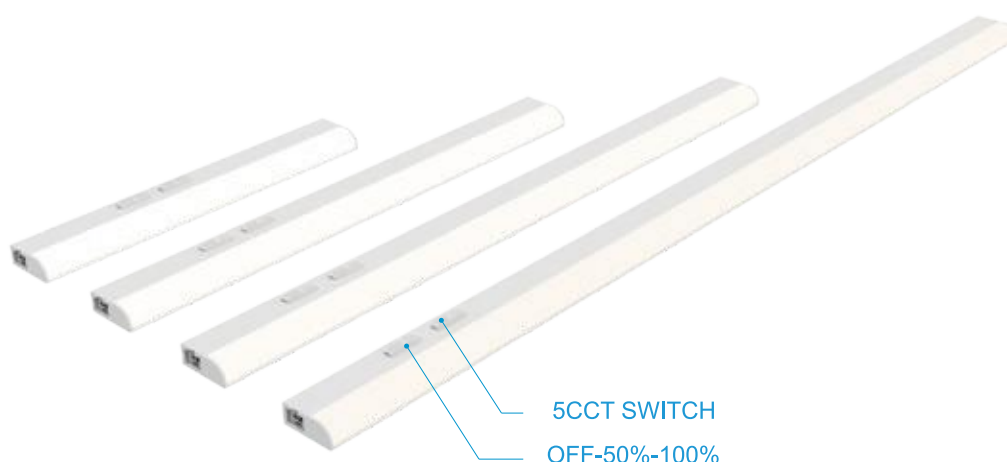

Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Aluminum
- Ultra slim



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED12UCL-3CCT-FP-B1	120	5	350	2700~6500	—	304*17*43	
HLLED18UCL-3CCT-FP-B1	120	7	500	2700~6500	—	457*17*43	
HLLED24UCL-3CCT-FP-B1	120	10	750	2700~6500	—	610*17*43	
HLLED36UCL-3CCT-FP-B1	120	14	1000	2700~6500	—	914*17*43	

Undercabinet Light Bar



Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Aluminum
- Ultra slim

25,000
HOURS

CRI
>80Ra or >90Ra

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED12UCL-3CCT-A1	120	7	600	3000	—	304*25.4*38	
HLLED18UCL-3CCT-A1	120	10	900	3000	—	457*25.4*38	
HLLED24UCL-3CCT-A1	120	14	1200	3000	—	610*25.4*38	
HLLEDUCL-5WY-5W	100~240	5	400	2700-5000	—	300*15*20	
HLLEDUCL-5WY-10W	100~240	10	800	2700-5000	—	600*15*20	



wireless
integrated
system



Dim from Unit
or Wall Dimmer



Power Linkable
up to 45



Control up to
100 Devices Wirelessly



Low Profile
Design




50 ft. Range
per Device

Smart Sensor & Controls

+ Add Accessories to Customize Your OneSync System



Add extra
outlets
AC Outlet



*Hardwire your
light bar
Hardwire Converter



Control with motion
or hand wave
Motion Sensor or
Hand Wave Sensor



Control
wirelessly
Handheld Remote or
Wireless Control Pad



WiFi
smart bridge
Enables smart app and
voice assistant control.

2.4G OneSync Undercabinet Light



Features

- Power light within a 50ft range of other OneSync devices
- No linking required
- Control light level and color together
- Add additional accessories for expanded control options

Dim from Unit or Wall Dimmer

Power Linkable up to 45

Control up to 100 Devices Wirelessly

Low Profile Design

50 ft. Range per Device



Change color temperatures or adjust brightness with the push of a button on the fixture or a separately sold remote control. Connect up to 100 fixtures wirelessly: integrated OneSync technology auto-pairs with devices up to 50 feet away.

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDUCL-20FP-5CCT-20W	120	20	1400~1500	2700~6500	—	520*123.25	

2.4G OneSync Undercabinet Light




Features

- Power light within a 50ft range of other OneSync devices
- No linking required
- Control light level and color together
- Add additional accessories for expanded control options



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDUCL-12-5CCT-7.5W	120	7.5	450~500	2700~5000	—	216*33*16	
HLLEDUCL-18-5CCT-13.5W	120	13.5	850~900	2700~5000	—	368*33*16	
HLLEDUCL-24-5CCT-17W	120	17	1100~1200	2700~5000	—	520*33*16	
HLLEDUCL-36-5CCT-28W	120	28	1700~1800	2700~5000	—	825*33*16	

2.4G OneSync Undercabinet Light

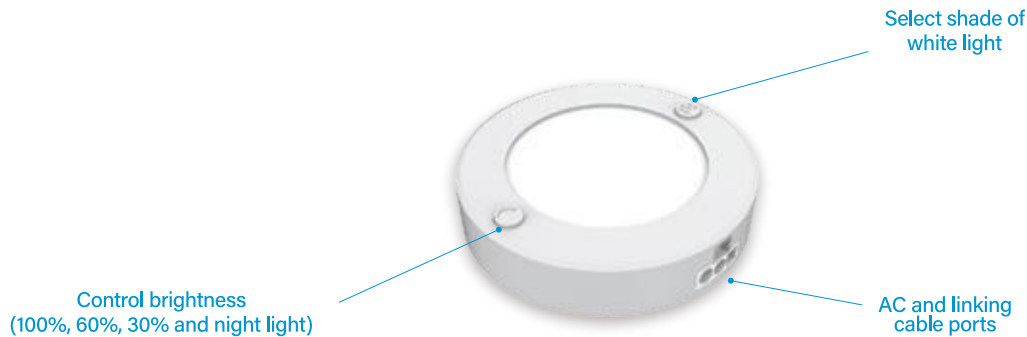

Features

- Power light within a 50ft range of other OneSync devices
- No linking required
- Control light level and color together
- Add additional accessories for expanded control options




Change color temperatures or adjust brightness with the push of a button on the fixture or a separately sold remote control.

Connect up to 100 fixtures wirelessly: integrated OneSync technology auto-pairs with devices up to 50 feet away.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDUCL-PUCK-5CCT-5W	120	5	300~350	2700~5000	—	75*75*16	

2.4G OneSync Flat Undercabinet Light

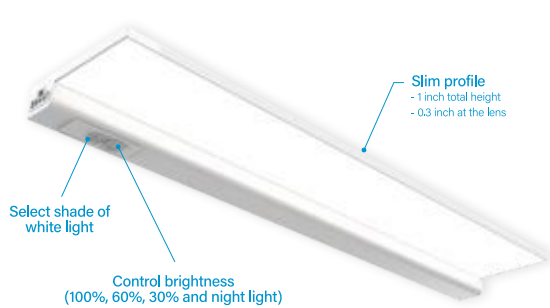

Features

- Power light within a 50ft range of other OneSync devices
- No linking required
- Control light level and color together
- Add additional accessories for expanded control options



Dim from Unit
or Wall Dimmer



Power Linkable
up to 45




Control up to
100 Devices Wirelessly



Low Profile
Design



50 ft. Range
per Device

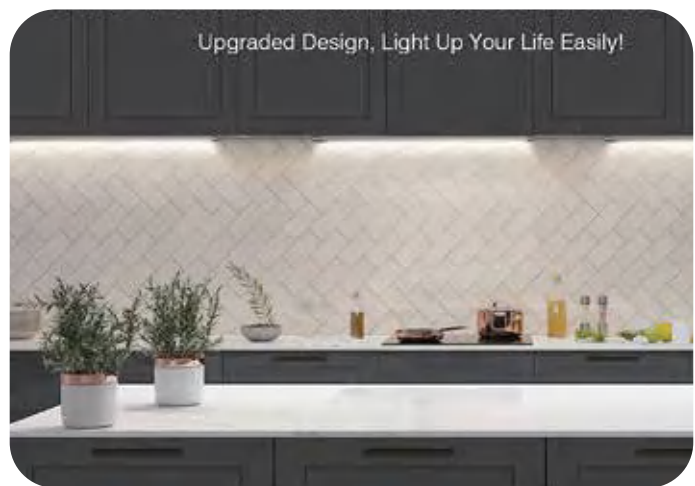

2.4G RF




Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDUCL-12FP-5CCT-10W	120	7.5	700~750	2700~5000	—	241*105*25	
HLLEDUCL-18FP-5CCT-15W	120	13.5	1100~1150	2700~5000	—	368*105*25	
HLLEDUCL-24FP-5CCT-20W	120	17	1400~1500	2700~5000	—	520*105*25	
HLLEDUCL-36FP-5CCT-28W	120	28	2000~2100	2700~5000	—	826*105*25	

2.4G OneSync Motion Sensor



Features


- Power light within a 50ft range of other OneSync devices
- No linking required
- Add additional accessories for expanded control options

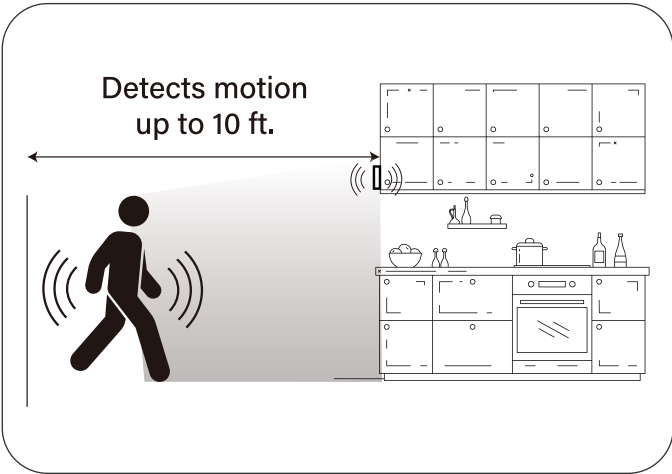

Integrated OneSync technology auto-pairs with devices up to 50 feet away.

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDUCL-MOT	120	—	—	—	—	75*75*27	

2.4G OneSync Switch

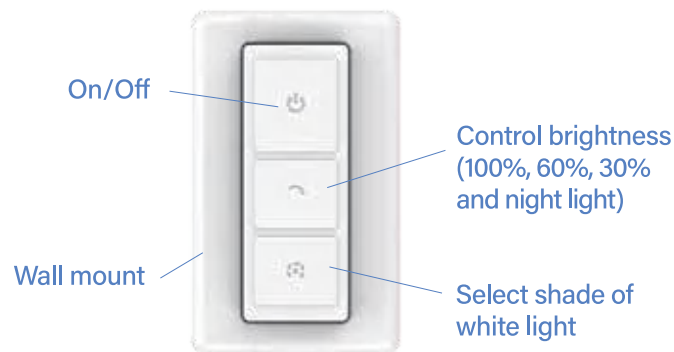

Features

- Power light within a 50ft range of other OneSync devices
- No linking required
- Add additional accessories for expanded control options



Integrated OneSync technology auto-pairs with devices up to 50 feet away.

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDUCL-REMOTE2	3	—	—	—	—	80*50*16.5	

Saturn Ceiling Light



Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Aluminum
- Double layers for good decoration
- Available in PMMA and glass lens



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED12CL-15W	90-260/120/230	15	1200~1300	300~5000	—	Φ 305*60	
HLLED15CL-24W	90-260/120/230	24	1800~2000	3000~5000	—	Φ 380*60	
HLLED18CL-38W	90-260/120/230	38	2900~3000	3000~5000	—	Φ 380*60	

Oreo Ceiling Light



Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Aluminum
- Double layers for good decoration
- Available in black, galvanized nickel and brushed nickel.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED-CEILING-20W	120/230	20	1500	5000	—	Φ 355*80.5	
HLLED-CEILING-23W	120/230	23	1700	5000	—	Φ 380*80.5	

MM & BAT Ceiling Light



Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Battery powered nightlight triggered by microwave motion sensor
- Adjustable detection range of 0-15 feet
- Automatic shutoff after 5 minutes of inactivity.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED-CEILING-24W	120/230	24	1800	2700~6500	—	Φ 354*68	


Ultra slim Ceiling Light



Microwave Motion Sensor

Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Aluminum+PC
- Microwave Motion Sensor for energy saving
- 56mm ultra slim creates a clean, minimalist look.

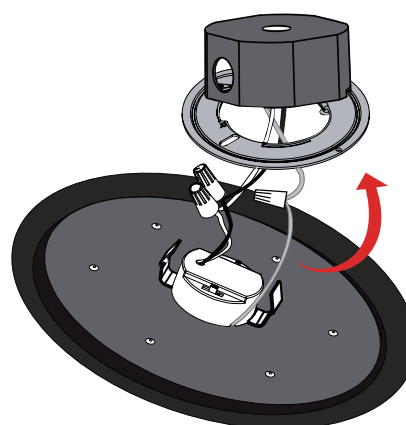

25,000
HOURS

CRI
>80Ra or >90Ra

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDFM11LP-A1	120	12	1100	2700~6500	—	Φ 283*56	
HLLEDFM15LP-A1	120	17	1500	2700~6500	—	Φ 380*56	
HLLEDFM9LP-A1	120	11	900	2700~6500	—	Φ 232*56	

Deco Ceiling Light



Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Aluminum+PC



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Size (mm)	Dimmable
HLLEDDECO-TYPE-A1	120	11/12.5/15.5/16.5 17.5/20.5/27.5	1000/1100/1300/1400 1500/1800/2500	3000~6500	Φ 255/280/330/355/380 457/635*56	
HLLEDDECO-TYPE-B1	120	11/12.5/15.5/16.5 17.5/20.5/27.5	1000/1100/1300/1400 1500/1800/2500	3000~6500	Φ 255/280/330/355/380 457/635*56	
HLLEDDECO-TYPE-C1	120	11/12.5/15.5/16.5 17.5/20.5/27.5	1000/1100/1300/1400 1500/1800/2500	3000~6500	Φ 255/280/330/355/380 457/635*56	

Ceiling Light



Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Aluminum+PC



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED11CL-3CCT-A1	120	18	1200	3000~5000	—	Φ 280*62	
HLLED14CL-3CCT -A1	120	23	2000	3000~5000	—	Φ 355*62	

Double Night Light Ceiling Light



Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Aluminum+PC

Nightlight mode: Nightlight mode provides reduced light output at 2200K for very soft illumination at night.

Selectable CCT's: With a simple flip of color switch, you can preset your preferred light color temperature.

3 Ways of Install: This fixture is available to hardwire install, canless install and recessed install.

FOR NORMAL USE:



TURN ON AND OFF CENTER PRIMARY LIGHT SOURCE USING ANY WALL SWITCH.

25,000 HOURS

CRI >80Ra or >90Ra

FOR NIGHT LIGHT USE:



QUICKLY TOGGLE LIGHT SWITCH ON-OFF-ON TO TURN OFF THE PRIMARY CENTER LIGHT AND TURN ON THE OUTER RING NIGHT LIGHT.

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDCL-A1	100-240	21.5	1550	2700~6500	—	Φ 330*65	

Chrome Double Ring Ceiling Light



Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime of 25,000H with 5-year warranty
- Aluminum+PC
- Available in both PMMA and glass lens.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDCL-B1	100-240	24	1800	3000~6500	—	Φ 330*65	

Ceiling Light




Features

- High quality driver with minimized flickering
- Use high quality chips in ALU+PC body with high diffusion PC cover
- Customized base
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty
- Trimless round Ceiling Light suitable for outdoor use,
- switch to choose power and shade of white




Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLEDCL-3WY-12W	100~240V	6/12	1200	2700-4000	—	Φ 250*68.5	
HLEDCL-3WY-16W	100~240V	8/16	1200	2700-4000	—	Φ 350*68.5	
HLEDCL-3WY-22W	100~240V	11/22	1200	2700-4000	—	Φ 450*68.5	
a HLEDCL-15C	100~240V	15	1100~1200	2700~6500	—	Φ 304*90.5	
a HLEDCL-17C	100~240V	18	1300~1400	2700~6500	—	Φ 304*90.5	
HLEDCL-80W	100~240V	80	11000	2700~6500	—	Φ 650*130	
HLEDCL-35W(RC)	100~240V	35	3200	3000	—	Φ 250*65	

Capsule Ceiling Light

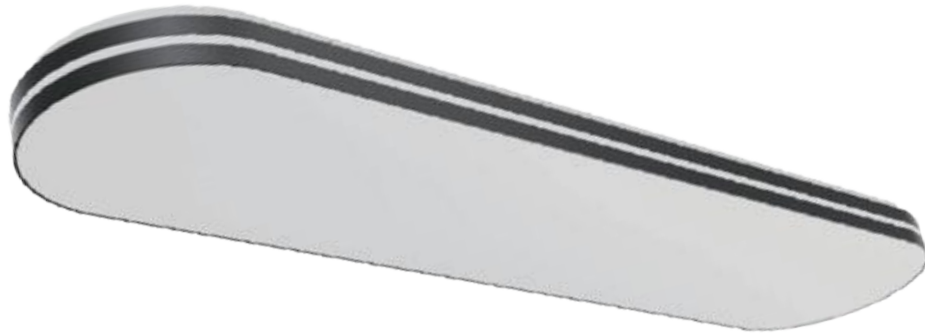

Features

Capsule Ceiling Light, flush mount design
Double layer frame enhances vintage style
Quick installation with all accessories included
Large size for uniform light distribution
3CCT/4WAY/5CCT/6WAY options with consistent PC cover.

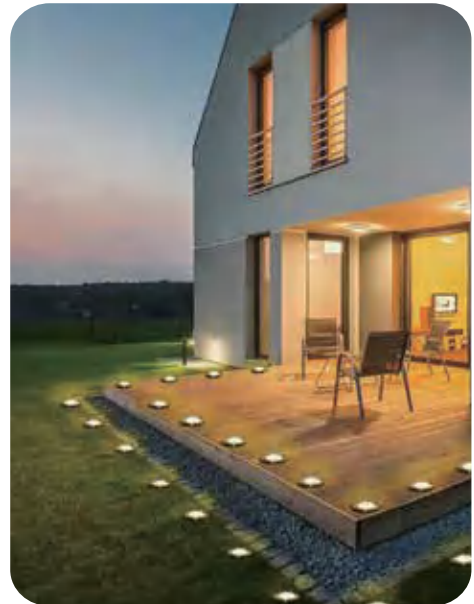

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED CAP-50W	120	50	4000	3000~5000	—	1168*65*254	

Battery Backup Ceiling Light



Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime of 25,000H with 5-year warranty
- Aluminum+PC
- With battery for emergency use
- PIR motion sensor function for energy saving in unmanned environment

PIR Motion Sensor 5" panel light, LED drive integrated



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
aHLLDCL7.5/840/25/BAT	5	5	350~420	4000	—	Φ 190*54	
aHLLDCL7.5/840/35/BAT	5	5	350~420	4000	—	Φ 190*54	
bHLLDCL7.5/840/25/MOT	5	5	350~420	4000	—	Φ 190*54	
bHLLDCL7.5/840/35/MOT	5	5	350~420	4000	—	Φ 190*54	

*a: Turn on or off with included remote control

*b: Turn on only when motion is detected

*a/b: Easy magnetic-mount installation

*a/b: With rechargeable battery

*Easy magnetic-mount installation

*With rechargeable battery

Wooden Ceiling Light



Features

Retro-style wooden frame with PMMA covering and night light feature.

Excellent heat dissipation, extending lifespan to 40,000–50,000 hours.

Input voltage: 100V to 240V.


Fast installation: super easy to set up.

2.4G remote control for stepless dimming and selectable shades of white.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLEDCL-45W(2.4G)	100~240	45W	5000	4000	—	Φ 523*116	

Linkable Linear Light

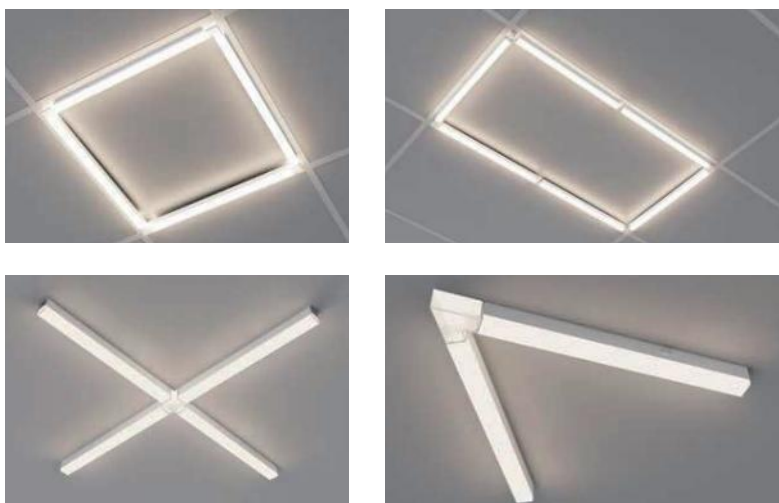

Features

Multiple shapes are available with different arrangements of the units.

Use high quality chips,

High quality driver with minimized flickering with high diffusion PC cover

Dimmable option

Canless design: eliminates bulky housings

Universal Voltage: Compatible with multiple voltage systems.

Excellent heat dissipation, extending its lifespan to 50,000 hours.

Fast installation: super easy to set up, all necessary accessories are included.

Low-profile design matches the ambient environment and ensures even light distribution



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLLED2*2GCL-6WY-40W	120~277	40	4000	2700~5000	—	603*603*31	
HLLED2*4GCL-6WY-45W	120~277	45	4500	2700~5000	—	603*1213*31	
HLLED2FTCL-6WY-10W	120~277	10	1000	2700~5000	—	610*25*37	
HLLED4FTCL-6WY-20W	120~277	20	2000	2700~5000	—	610*25*37	

Fixed Blade Fan Lights



Features

- High quality driver with minimized flickering
- Use high quality chips in ALU+PC body with high diffusion PC cover
- Customized base
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable	CFM (m³)
HLLEDFAN-45W-A	120	45	4000	3000~5000	E26	Φ 280*152		210
HLLEDFAN-60W-B	120~240	60	1600	2700~6500	—	Φ 504*212		1200
HLLEDFAN-60W-C	120~240	60	3000	2700~6500	—	Φ 457*150		1200

Bladeless Fan with Lights



Features

- Safe and no exposed fan blade design
- High quality driver with minimized flickering
- Use high quality chips in ALU+PC body with high diffusion PC cover
- Dimmable option
- Lifetime of 15,000H~25,000H with 2-3 years warranty



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable	CFM (m ³)
HLLEDFAN-50W-D	120~240	50	2000	2700~6500	—	Φ 432*200		1000
HLLEDFAN-60W-F	120~240	50	1600	2700~6500	—	Φ 490*180		400

Retractable Blade Fan Lights




Features

- High quality driver with minimized flickering
- Use high quality chips in ALU+PC body with high diffusion PC cover
- Dimmable option
- Lifetime of 50,000H with 5 years warranty



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable	CFM (m³)
HLLEDFAN-80W-G	120~240	80	2650	2700~6500	—	Φ 483*360		4000
HLLEDFAN-75W-H	120~240	75	3000	2700~6500	—	Φ 483*360		4000
HLLEDFAN-80W-I	120~240	80	3000	2700~6500	—	Φ 483*332		4000
HLLEDFAN-80W-J	120~240	80	3000	2700~6500	—	Φ 483*332		4000

Bath Fan Light

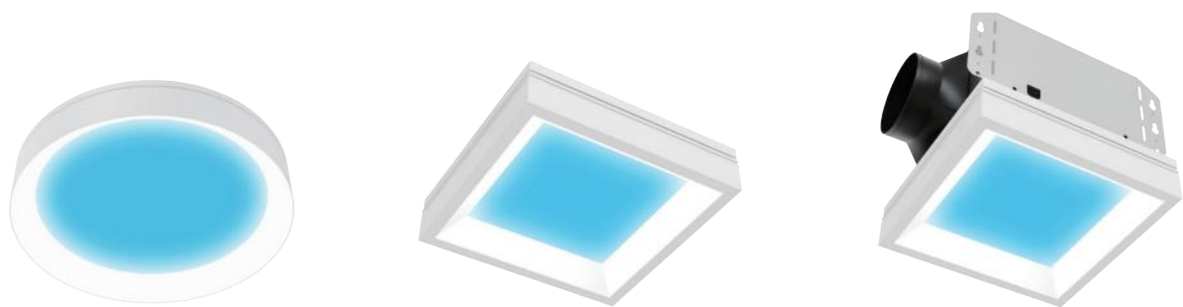

Features

- High quality design: Very quiet bathroom fan and strong air movement
- Easy-to-Install: No cut housing installation and replaces most small bathroom standard fans using existing ceiling opening.
- Efficient: excellent motor performance, working at least 25,000 hours.
- Galvanized steel housing resists corrosion.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLED-20FL-24	90-260/120/230	24	1200	4000	—	Φ 330*57	—
HLLED-20FL-20	90-260/120/230	20	1000	4000	—	240*240*55	—
HLLED-20FL-30	90-260/120/230	30	1500	4000	—	360*360*55	—

Bath Fan Light



Features

High quality design: Very quiet bathroom fan and strong air movement

Easy-to-Install: No cut housing installation and replaces most small bathroom standard fans using existing ceiling opening.

Efficient: excellent motor performance, working at least 25,000 hours.

Galvanized steel housing resists corrosion.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Size (mm)	Dimmable
HLLED-43FL-C	110-120	43	—	2700/4000/5700	240*240*115	—
HLLED-REC-D	110-120	1632	—	—	360*360*212	—
HLLED-REC-E	110-120	1652	—	2700/4000/5700	300*300*150	—

Step Light



Features

Built to Last: The die-casting aluminum shell has excellent corrosion resistance and heat dissipation, extending its lifespan to 50,000hrs. Working temperature ranges -4°F to 104°F.

Ideal for illuminating and accenting pathways, steps, and gardens.


User-Friendly: 120V input voltage, no transformer required.

IP65 waterproof for wet location, ensures the reliability for both indoor and outdoor applications.

Fast Installation: Super easy to install, all the needed accessories are included.



Install direction options: great for both vertical and horizontal install, simply a change of lighting section manually.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLDSQ5-1.5GC	120	2.5	25	2700~6500	—	116*71*60	

Step Light




Features

Solar powered: Use solar panel to store energy for nighttime use and energy saving.

User-Friendly: 120V input voltage, No transformer required. IP65 waterproof for wet location, ensures the reliability for both indoor and outdoor applications.

Fast Installation: with stake to easily install,,all the needed accessories are included.

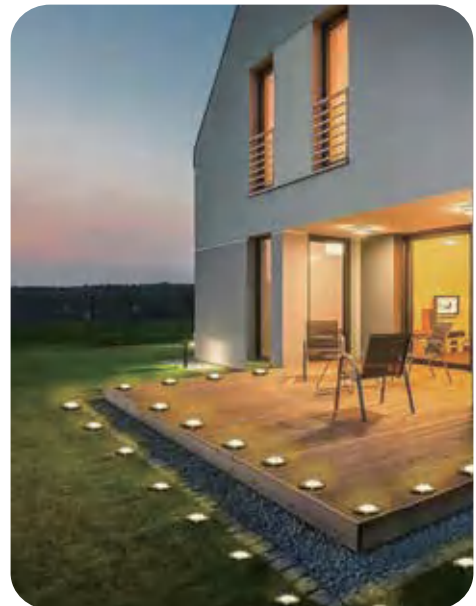

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLEDL-C11	100/230	1	15	RGBW	14500/600	Φ 115*115	
HLLEDSTEP	100/230	1.5	50-100	2700~6500	2000	250*43*42	
a HLLEDR5-1.5FC	100/230	1.5	45	2700~6500	—	Φ 24.6*45.7	
b HLLED5Q5-1.5GC	100/230	1.5	45	2700~6500	—	24.6*44.8	

Puck Light



Features

Rechargeable PIR Motion Sensor Puck Light.
 Activates all lights when one turns on. Ideal for stairwell use.
 Magnetic or adhesive installation for flexibility.
 Rechargeable Puck Light for Umbrella.
 Press for 3 brightness levels.
 Suitable for regular umbrellas. Rechargeable.
 Easy to install and uninstall.
 3 in 1 charging dock.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLEDPUCK/RGBW	DC5V	5	100	3000	2000	Φ127*28	

Garage Light


3-Level brightness:80W/60W/40W-10000lm/8000lm/5000lm



A.B



C

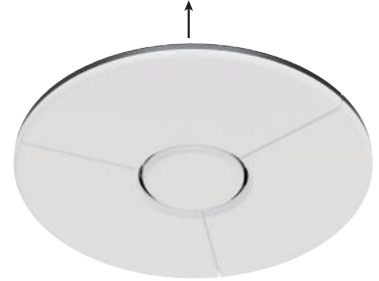


D



Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime 1~2-year warranty
- Weatherproof

Medium base garage light easy to install,
Foldable to set the lighting area

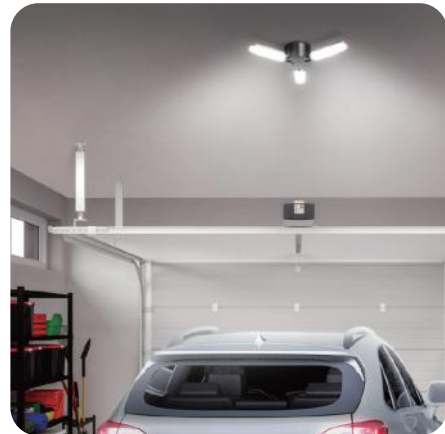

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLED-GARAGE-A	120/230	30	3000	5000	—	189*167*82	
HLLED-GARAGE-A	120/230	40	4000	5000	—	310*280*100	
HLLED-GARAGE-B	120/230	50	6000	5000	—	230*180*87	
HLLED-GARAGE-C	120/230	55	5500	5000	—	φ 132*267	
HLLED-GARAGE-C	120/230	80	8000	5000	—	φ 132*267	
HLLED-GARAGE-D	120/230	60	8000	5000	—	φ 202*103	
HLLED-GARAGE-D	120/230	80	10000	5000	—	φ 280*103	

Landscape Light



Features

Powered by free solar energy: The solar panel supports long-term operations. They will come on automatically at night and turn off automatically at dawn.

Suitable for outdoor use: The light can work normally under all kinds of weather with the waterproof rating of IP44 and weatherproof, no worries about rain, snow, frost, and sleet.

No wires:

Push the stake into the soil, it just takes a few seconds.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLEDSLS-1A5	120/230	1	—	2700~6500	—	Φ 220*500	
HLLEDSLS-1A6	120/230	1	—	2700~6500	—	Φ 220*800	
HLLEDSLS-1A3	—	1	30~40lm/hrs	1500	14500/800	Φ 120*1218	
HLLEDSLS-1A4	—	1	20~30lm/hrs	1500	18650/2000	Φ 77*668	

*Solar powered

*Both plastic and aluminum versions available.

*Light sensor. Turn on/off automatically from dusk to dawn.

Work Light



Features

- Retractable Work Light with high lumen output.
- Three adjustable brightness settings for customized lighting needs.
- Stable stand, perfect for dark place construction use.
- Adjustable height freely.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLEDWL-30	5	30	706/316/106	RGBW	/	1135*280*70	
HLLEDWL-120	180-265	120	2000-15000	2700-6500	/	1512*110	
HLLEDWL-100	180-265	100	12000	2700-6500	/	200*190*725	
HLLEDWL-150	180-265	150	18000	2700-6500	/	200*190*1020	

Solar Jar Light



Features

Powered by free solar energy: The solar panel supports long-term operations. They will come on automatically at night and turn off automatically at dawn.

Suitable for outdoor use: The light can work normally under all kinds of weather with the waterproof rating of IP44 and weatherproof, no worries about rain, snow, frost, and sleet.

Available in 5 CCT styles for versatile lighting options.

Offers 8 color modes to suit various moods and themes.

Creates a twinkling effect for enhanced ambiance.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLEDSSL-A	120/230	1.5	30	2700~6500	600	Φ 172*175	
HLLEDSSL-B	120/230	1.5	30	2700~6500	600	Φ 130*150	
HLLEDSSL-C	120/230	1.5	30	2700~6500	600	Φ 146*203	
HLLEDSSL-D	120/230	1.5	30	2700~6500	600	Φ 146*213	
HLLEDSSL-E	1.2	0.5	20	3000	—	—	
HLLEDSSL-F	1.2	0.5	/	3000	—	Φ 127*130	
HLLEDSSL-G	1.2	0.2	/	2700~6500	—	Φ 127*130	
HLLEDSSL-H	1.2	0.06	/	RGBW	—	Φ 90*267	

Flood Light



*Remote Control



*Portable



*FL


Features

- High quality IC driver with minimized flickering
- Dimmable option
- Lifetime of 50,000H with 5-year warranty
- Fade, cycle, or flash colors
- RF remote works through walls
- Mixed LEDs to select perfect colors
- Covers up to 80ft wide



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
a HLLEDFL-RC-8C10	5	8	500	2700-6500	—	175*32.5*124	
b HLLEDFL-RC-30C11	90-260/120/230	30	1200	2700-6500	—	175*32.5*124	
c HLLEDFL-RC-30C12	90-260/120/230	30	1200	2700-6500	—	175*32.5*124	
a HLLEDFL-PT-8C10	5	8	500	2700-6500	—	175*32.5*124	
b HLLEDFL-PT-30C11	90-260/120/230	30	1200	2700-6500	—	175*32.5*124	
c HLLEDFL-PT-30C12	90-260/120/230	30	1200	2700-6500	—	175*32.5*124	
HLLEDFL-30W	90-260/120/230	30	3000	2700-6500	—	228*188*28	
HLLEDFL-50W	90-260/120/230	50	5000	2700-6500	—	228*188*28	
HLLEDFL-100W	90-260/120/230	100	10000	2700-6500	—	228*188*28	

Flood Light



Features

- High quality IC driver with minimized flickering
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty
- Aluminum




Powered by free solar energy: The solar panel supports long-term operations. They will come on automatically at night and turn off automatically at dawn.

50,000 HOURS CRI >80Ra or >90Ra

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLEDFL-SOLAR-100W	3.2	100	900	2700~6500	15	198*50*132	
HLLEDFL-SOLAR-200W	3.2	200	1800	2700~6500	25	306*50*198	
HLLEDFL-SOLAR-400W	3.2	400	3600	2700~6500	40	275*50*173	

Security Light

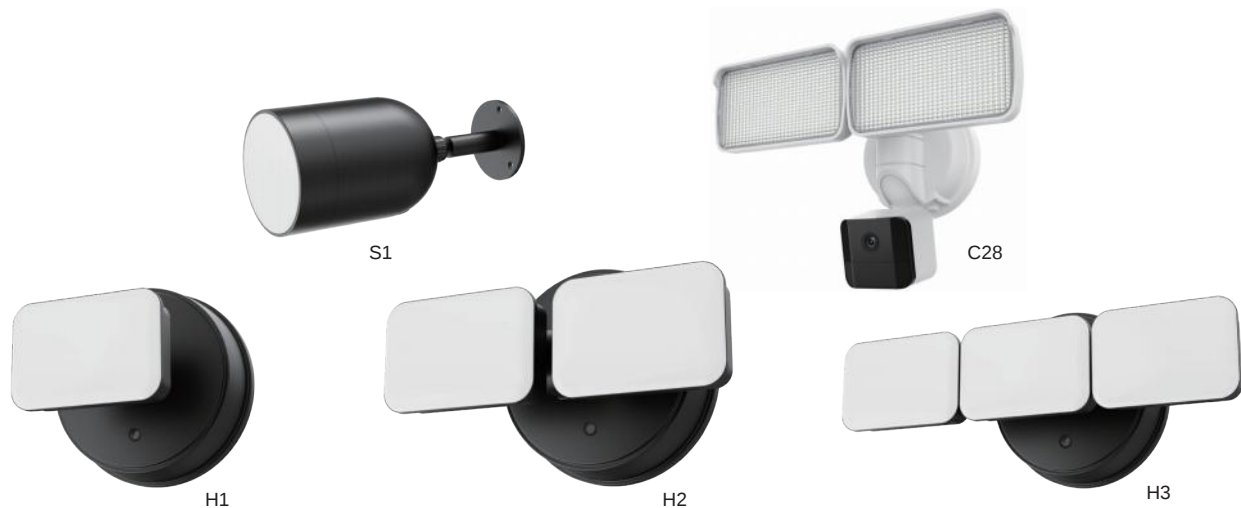

Features

SIMPLE, RELIABLE, SECURE

HIGH PERFORMANCE, PRO-HD - Experience magnificent full 1080p HD video resolution @20fps. This home security camera features an extra-wide 120° viewing angle allowing you to cover every angle.

SMARTER SECURITY – Receive motion detection alerts via email or push notifications and instantly review recorded footage directly from your smartphone using the Amcrest Smart Home app.

DAY OR NIGHT, RAIN OR SHINE – This Amcrest outdoor spotlight cam features a heavy-duty IP44 weatherproof housing to protect against dust and rain. The WiFi IP camera's built-in LEDs can achieve incredible 2,500lm, allowing you to see clear 1080p HD footage.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLEDSSL-S1	3.7	4	400	2700~6500	2*2000	Φ80*120	
HLLEDSSL-C28	90-260/120/230	28	2500	5000	—	—	
HLLEDSSL-H1	3.7	4	400	2700~6500	2*2000	130*139*127	
HLLEDSSL-H2	3.7	6	600	2700~6500	3*2000	221*139*127	
HLLEDSSL-H3	3.7	9	900	2700~6500	3*2000	258*139*127	

High Bay Lighting



Features

- High quality IC driver with minimized flickering
- Dimmable option
- Maintenance free - no bulb to change
- Lifetime of 50,000H with 5-year warranty



40,000
HOURS

CRI
≥80Ra or ≥90Ra

IP65

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLEDUFO-100BC	90-260/120/230	100	12000-13000	2700~6500	—	Φ 280*109	
HLLEDUFO-150BC	90-260/120/230	150	19000-20000	2700~6500	—	Φ 330*110	
HLLEDUFO-200BC	90-260/120/230	200	25000-26000	2700~6500	—	Φ 380*111	

Wall Light



Features

- Maintenance free - no bulb to change
- Weatherproof
- Powered by solar panel



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLEDWL-SOLAR-D1	1.2	0.1	51	RGBW	—	203.5*100*73.3	—
HLLEDWL-SOLAR-D2	3.7	1	501	W	—	—	—
HLLEDWL-SOLAR-E1	120	18~30	1500~2400	3000~5000	—	293.3*190*190	—
HLLEDWL-SOLAR-F1	3.7	0.6	50	3000	—	—	—

*C1: Solar panel:67*56mm/3V/0.5W/1000mA;

*C2: Solar panel:136*136mm/6V/3W/2200mA

Wall Light



Features

- Aluminum Wall sconce, up and down light emitting, suitable for GU10 bulb, IP54 for outdoor use.
- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime 1~2-year warranty
- Weatherproof
- Powered by solar panel



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Size (mm)	Dimmable
HLWL-GU10-A	220-240	/	/	/	GU10	81*92*68	
HLWL-GU10-B	220-240	/	/	/	GU10	81*150*68	
HLWL-GU10-C	220-240	/	/	/	GU10	80*150*68	
HLWL-GU10-D	220-240	/	/	/	GU10	80*81*68	

Wall Light



Dusk To Dawn
ON at night, OFF during the day

LS-A1



Dusk To Dawn
ON at night, OFF during the day

LS-A2



WP-A1



WP-A2



WP-B1



WP-B2

Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime 1~2-year warranty
- Weatherproof



25,000
HOURS

CRI
>80Ra or >90Ra

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLEDWL-LS-A1	120/230	13	1200	3000	—	220*56.5*128.2	
HLLEDWL-LS-A2	120/230	9~13	800~1200	3000~4000	—	220*56.5*128.2	
HLLEDWL-WP -A1	120/230	18	1440	3000~5000	—	202*100*151	
HLLEDWL-WP-A2	120/230	30	2400	3000~5000	—	354*100*151	
HLLEDWL-WP -B1	120/230	18	1440	3000~5000	—	202*100*151	
HLLEDWL-WP-B2	120/230	30	2400	3000~5000	—	354*100*151	

Moisture-proof Wall sconce



Features

Sleek style complements any ambient environment.

Durable base and high-quality diffuser ensure exceptional light distribution.

Waterproof design makes it ideal for outdoor use.



50,000 HOURS  CRI >80Ra or >90Ra

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLEDRWL-20W	120/230	18	1440	2700-6500	——	174*174*47.6	
HLLEDRWL-20W	120/230	15	1200	2700-6500	——	158.5*89.5*45.7	
HLLEDRWL-R-20W	120/230	20	1000	RGBW 1500-9000	——	Φ230*72	
HLLEDRWL-S-20W	120/230	20	1000	RGBW 1500-9000	——	158.5*89.5*45.7	
HLLEDRWL-O-20W	120/230	20	1000	RGBW 1500-9000	——	158.5*89.5*45.7	

Wall Light




Features

- High quality IC driver with minimized flickering
- Maintenance free - no bulb to change
- Lifetime 1~2-year warranty
- Weatherproof
- Powered by solar panel



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLEDWL-J1	100~277	35	3000	5000	—	261.5*149.5*165.5	—

Aquarium Clip Light

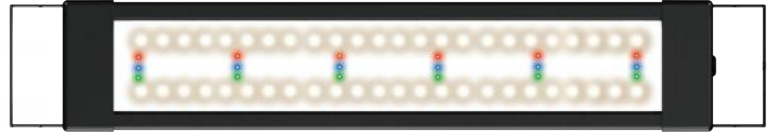

Features

Suitable for aquarium tanks for freshwater, saltwater and plant growth application options.


Available in RBW or RGBW

High brightness and energy saving.

Extendable legs to fit different sizes of aquarium tanks

High-quality light: color rendering index is close to natural light, protecting eyes and fish.

With Mode, Brightness, CCT and Timer buttons: freely set the lighting time (8H/10H) and adjust modes to meet different needs.

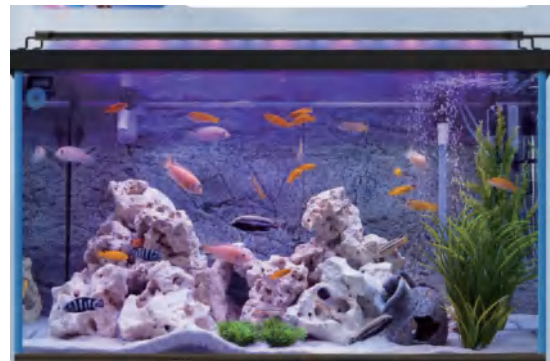

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLEDAUA16-PG-PET	120/230	19	1500	6500/8500	—	406.4*83.5*16.5	
HLLEDAUA16-FW-PET	120/230	19	1500	6500/8500	—	406.4*83.5*16.5	
HLLEDAUA28-PG-PET	120/230	28-36	2300	6500/8500	—	711.2*83.5*16.5	
HLLEDAUA28-FW-PET	120/230	28-36	2300	6500/8500	—	711.2*83.5*16.5	
HLLEDAUA43FW-PET	120/230	28-36	3200	6500/8500	—	1092.2*83.5*16.5	
HLLEDAUA48FW-PET	120/230	36-48	3200	6500/8500	—	1092.2*83.5*16.5	
HLLEDAUA3.5-CLIP-PG-PET	120/230	16	1000	6500/8500	—	400*88.9*40.5	
HLLEDAUA3.5-CLIP-FW-PET	120/230	16	1000	6500/8500	—	400*88.9*40.5	
HLLEDAUA16-SW-PET	120/230	19	1500	6500/8500	—	406.4*83.5*16.5	
HLLEDAUA28-SW-PET	120/230	28-36	2300	6500/8500	—	711.2*83.5*16.5	
HLLEDAUA43SW-PET	120/230	28-36	3200	6500/8500	—	1092.2*83.5*16.5	
HLLEDAUA48SW-PET	120/230	36-48	3200	6500/8500	—	1092.2*83.5*16.5	

Vintage Mirror Light



Features

360deg rotatable: a 360-degree swivel joint for helping you observe self-makeup from different angles.

Magnification: 1x at one side and 10x on the other side

Touch dimming: simply a touch on base to turn light on and off.

Rechargeable: The light is built with battery that is rechargeable, great for portable use.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLEDWL-5CCT-A1	5	2	350~400	2700~6500	18650/2500	365*365*495	
HLLEDWL-5CCT-A2	90-260/120/230	12	350~400	2700~6500	—	268*268*444	
HLLEDWL-B1	3.7	—	100~150	2700~6500	—	104*104*13.4	
HLLEDWL-3CCT-C1	120	15	400	2700~6500	—	437*268*192	

*a/c: Stepless dimming

Portable Mirror Light




A



B



C

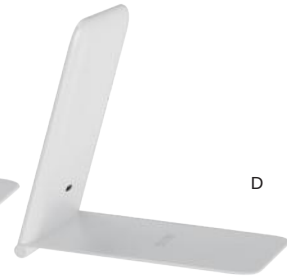

D

Features

- Portable
- Stepless dimming: Long press the side button to choose different light levels according to your needs.
- 1800mAh Li-polymer Battery: USB charging, connect a laptop, charger or mobile power supply via Micro USB for charging, no worry about replacing batteries.



50,000 HOURS

CRI >80Ra or >90Ra

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLEDPML-A	5	6.5	300-350	2700-6500	1800	Φ 104*13.4	
HLLEDPML-B	5	5	300	2700-6500	1000	190*125*12	
HLLEDPML-C	5	10	300	2700-6500	2000	330*241*9.5	
HLLEDPML-D	5	10	300	2700-6500	2000	330*241*9.5	

- *Touch on/off
- *Color Changing
- *Makeup Check
- *Bluetooth

Frameless Mirror Light



Features

- Wall mounted
- Lighted makeup mirror surrounded by LED bulbs
- Smart Touch Control & Memory Function
- Aluminium frame and base and high quality LED bulbs, strong and durable.

*Touch on/off *Color Changing
*Music by WiFi *Defogging

50,000
HOURS

CRI
>80Ra or >90Ra



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLEDFML-S24-20	120~230	20	500	2700-6500	—	Φ610*40	
HLLEDFML-S28-25	120~230	25	600	2700-6500	—	Φ711*40	
HLLEDFML-R24-30-DL	120~230	30	800	2700-6500	—	Φ610*40	
HLLEDFML-R28-30-DL	120~230	30	800	2700-6500	—	Φ711*40	
HLLEDFML-R3224-30-DL	120~230	30	800	2700-6500	—	813*610*45	
HLLEDFML-O2331-30-DL	120~230	30	800	2700-6500	—	600*800*45	

Black Framed Mirror Light - Edgelit



Features

- Wall mounted
- Lighted makeup mirror surrounded by LED bulbs
- Smart Touch Control & Memory Function
- Aluminium frame and base and high quality LED bulbs, strong and durable.
- Touch ON/OFF
- Music by WiFi
- Defogging
- Color changing
- Microwave Sensor



50,000 HOURS CRI >80Ra or >90Ra

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLEDFML-R28-25-EL	120~230	25	800	2700-6500	—	Φ711*45	
HLLEDPML-S3224-30-EL	120~230	30	800	2700-6500	—	813*610*45	
HLLEDPML-O2436-30-EL	120~230	30	800	2700-6500	—	610*914*45	

Black Framed Mirror Light - Backlit



Features

- Wall mounted
- Lighted makeup mirror surrounded by LED bulbs
- Smart Touch Control & Memory Function
- Aluminium frame and base and high quality LED bulbs, strong and durable.
- Touch ON/OFF
 - Music by WiFi
 - Color changing
- Microware Sensor



50,000
HOURS

CRI
>80Ra or >90Ra

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLEDFML-O2331-30-BL	120~230	30	800	2700-6500	—	600*800*45	

Mirror Front Light



C



B



A

Features

- High quality IC driver with minimized flickering
- Lifetime 1~2-year warranty

50,000 HOURS CRI >80Ra or >90Ra

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLEDMFL-25-A	120/230	25	2400	2700	—	530*180*202	
HLLEDMFL-16.5-B	120/230	16.5	1500	2700	—	239*103*78	
HLLEDMFL-22-C	120/230	22	2000	2700	—	325*119*72	

Track Light



Features

- High IC driver with minimized flickering
- Edgelit technology to provide great lighting
- Dimmable option
- Lifetime of 5,0000H with 5-year warranty
- Optional magnetic installation



50,000
HOURS

CRI
>80Ra or >90Ra

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Cap	Battery (mAh)	Size (mm)	Dimmable
HLLEDTL-A1	90-260/120/230	9	850	2700~6500	—	—	201*57.5*57.5	
HLLEDTL-COB-B1	90-260/120/230	6	200	2700~6500	—	—	33*33*85	
HLLEDTL-COB-B2	90-260/120/230	12	400	2700~6500	—	—	43*43*110	
HLLEDBTL-COB-C1	90-260/120/230	12	400	2700~6500	—	—	80*80*148	

Street Light



Features

Reliable Design – Designed with curved lines for a more harmonious and beautiful look. The use of aluminum material provides strong protection and durability for the heat while ensuring heat dissipation.

Waterproof IP65 - Designed for both wet and damp locations, enclosed designed stands up to Rust, Corrosion, Cracking and any Electrical Shocks or Fires due to Moisture.



50,000
HOURS

CRI
>80Ra or>90Ra

IP65

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
HLLEDHSL-50W	220-240	50	5500	2700~6500	—	Light: 346*113*67 Pillar: D48*300	
HLLEDHSL-100W	220-240	100	11000	2700~6500	—	Light: 464*128*67 Pillar: D48*500	
HLLEDHSL-150W	220-240	150	16500	2700~6500	—	Light: 535*172*82 Pillar: D58*300	
HLLEDHSL-200W	220-240	200	22000	2700~6500	—	Light: 610*195*85 Pillar: D58*500	

Pendant Light



Features

Industrial Style Appearance: minimalist design concept.

Easy Installation: Allows you to place your lamp where you need it most for easy access such as bedroom, living room, kitchen, dining room, hallway.

Modern & Industrial Design: With the modern minimalist design concept, it has a sturdy metal body and a stylish bubble glass shape for an added industrialized look.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Colour	Size (mm)	Dimmable
HLLEDTLB-A2	90-260/120/230	—	—	—	—	Φ 38.6*4570	—
HLLEDPL-5.5C4	90-260/120/230	5.5	350~450	2700~6500	clear	Φ 140*162	
HLLEDPL-5.5C4	90-260/120/230	5.5	350~450	2700~6500	amber	Φ 140*162	
HLLEDPL-15	90-260/120/230	15	800	3500	RGBW	Φ 150*1350	

Pendant Light




Features

Industrial Style Appearance: minimalist design concept.

Easy Installation: Allows you to place your lamp where you need it most for easy access such as bedroom, living room, kitchen, dining room, hallway.

Modern & Industrial Design: With the modern minimalist design concept, it has a sturdy metal body and a stylish bubble glass shape for an added industrialized look.

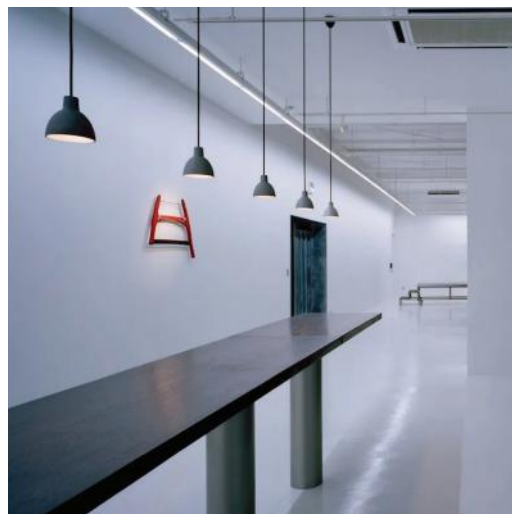

Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Colour	Size (mm)	Dimmable
HLLEDPL-A	90-260/120/230	—	—	—	—	Φ 200*203	
HLLEDPL-B	90-260/120/230	—	—	—	—	Φ 200*252	
HLLEDPL-C	90-260/120/230	—	—	—	—	Φ 120*286	

Pendant Light

1.5m adjustable



Features

Industrial Style Appearance: minimalist design concept.

Easy Installation: Allows you to place your lamp where you need it most for easy access such as bedroom, living room, kitchen, dining room, hallway.

Modern & Industrial Design: With the modern minimalist design concept, it has a sturdy metal body and a stylish bubble glass shape for an added industrialized look.

D&E models feature a 1.5-meter cable length that can be adjusted freely.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Colour	Size (mm)	Dimmable
HLLEDPL-D	90-260/120/230	5	300	2700~6500	WHITE	Φ 100*1960	
HLLEDPL-E	90-260/120/230	5	300	2700~6500	WHITE/GARY	Φ 180*1800	
HLLEDPL-F	90-260/120/230	—	—	—	R/Y/W/B	Φ 173*1523	

Table Lamp Marble Base



Features

Industrial Style Appearance: Simple and unique design adds an industrial touch.

Easy to Use: Simple lamp holder with plug, just turn on the ON-OFF switch, you can enjoy warm light, read or work.

Wide Application: Can place it anywhere you need, such as bedroom, living room, standard room, dining room, office, bedside table wait.



Model Numbers	Voltage (V)	Watt (W)	Lumen (lm)	CCT (K)	Battery (mAh)	Size (mm)	Dimmable
a HLEDTLB-A4	90-260/120/230	—	—	—	—	Φ 90*90	—
b HLEDTLB-A5	90-260/120/230	—	—	—	—	Φ 92*92	—
c HLEDTLB-A6	90-260/120/230	—	—	—	—	Φ 75*110	—
a HLEDTLB-B1	90-260/120/230	—	—	—	—	Φ 105*145	—
b HLEDTLB-B2	90-260/120/230	—	—	—	—	Φ 105*122	—
c HLEDTLB-B3	90-260/120/230	—	—	—	—	Φ 102*102	—
a HLEDTLB-C1	90-260/120/230	—	—	—	—	Φ 80*100	—
b HLEDTLB-C2	90-260/120/230	—	—	—	—	Φ 95*100	—
c HLEDTLB-C3	90-260/120/230	—	—	—	—	Φ 78*110	—
a HLEDTLB-D1	90-260/120/230	—	—	—	—	Φ 70*75	—
b HLEDTLB-D2	90-260/120/230	—	—	—	—	Φ 100*200	—

